
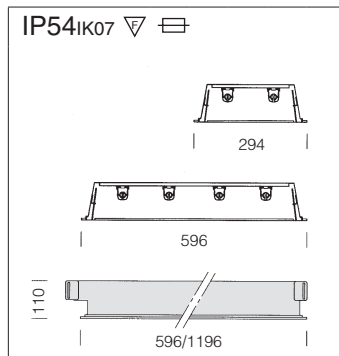
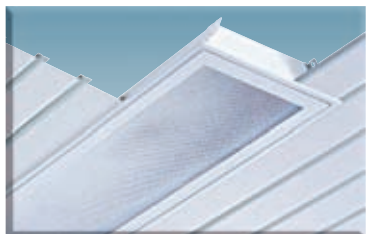


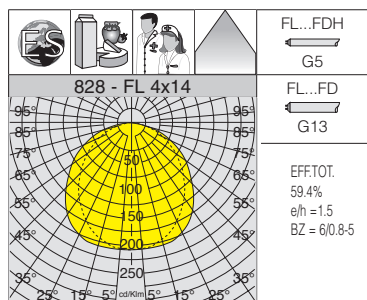

Housing/frame: made of sheet steel.
Diffuser: in polycarbonate.




Equipment: Recessed mounting brackets are welded on: as a result, a degree IP54 can be maintained also on the rear housing. Not suitable for plasterboard.

827 Comfort - opal diffuser

		CEL-F		CELL-F		CELF-D		Lamps (Ta=25°C)	SHOOKS	PANELS
wattage	colour	weight	code	weight	code	weight	code	Kelvin - ølm - Ra		
FL 2x18	white	4.00	156724-08			4.00	156724-12		•	
FL 2x36	white	8.20	156725-08			8.20	156725-12		•	
FL 4x18	white	8.80	156728-08			8.80	156728-12		•	•
FL 4x36	white	13.00	156729-08			13.00	156729-12		•	•
FL 4x14	white			7.00	156722-00			4000K - 1250lm - Ra 1b	•	•

828 Comfort - prismatic diffuser

		CEL-F		CELL-F		CELF-D		Lamps (Ta=25°C)	SHOOKS	PANELS
wattage	colour	weight	code	weight	code	weight	code	Kelvin - ølm - Ra		
FL 2x18	white	4.00	156824-08			4.00	156824-12		•	
FL 2x36	white	8.20	156825-08			8.20	156825-12		•	
FL 4x18	white	8.80	156828-08			8.80	156828-12		•	•
FL 4x36	white	13.00	156829-08			13.00	156829-12		•	•
FL 4x14	white			7.00	156822-00			4000K - 1250lm - Ra 1b	•	•

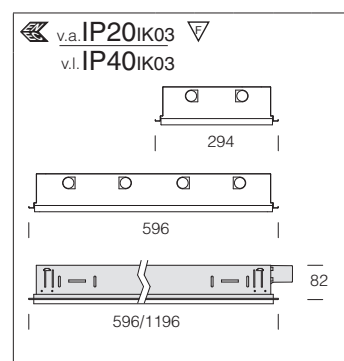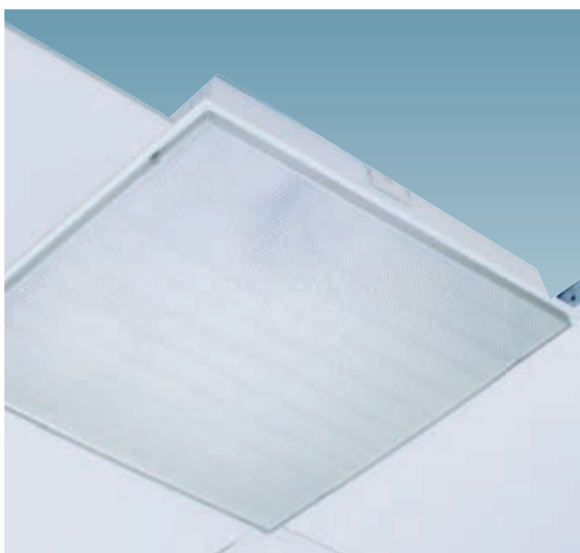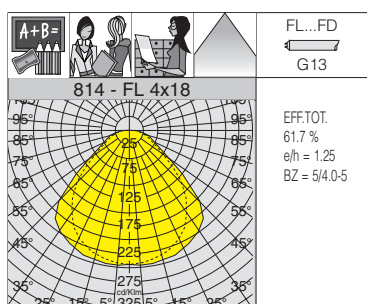

Housing: made of sheet steel.


Diffuser: anti-glare prismatic plexiglass.

Coating: acrylic anionic electrocoating, white, UV-stabilized.

Supplied without brackets for contact mounting on the cross T structure. When not contact mounted, use brackets acc. 901. See pag. 28.

814 Comfort - prismatic moulded diffuser


		CEL		CEL-E		SHOOKS	PANELS
wattage	colour	weight	code	weight	code		
FL 2x18	white	2.60	152045-08			•	
FL 2x36	white	4.40	152046-08	4.90	152046-09	•	
FL 4x18	white	4.00	152047-08	4.60	152047-09	•	•
FL 4x36	white	8.00	152048-08	8.50	152048-09	•	•

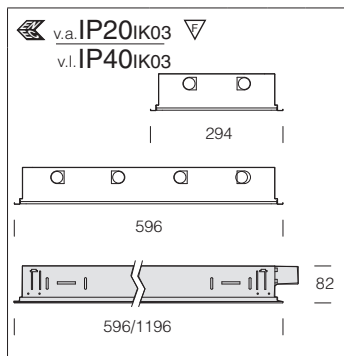

Housing/frame: made of sheet steel.

Diffuser: in opal plexiglass.

Supplied without brackets: for contact mounting directly on the cross T structure. When not contact mounted, (see page 28).

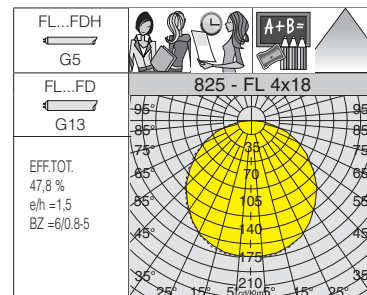


825 Comfort T5 - opal diffuser

		CELL		CELL-E		CELL-D		CELLD-DIG		SHOOKS	PANELS
wattage	colour	weight	code	weight	code	weight	code	weight	code		
FL 2x14	white	3.40	156530-00							•	
FL 2x28	white	4.60	156531-00	5.00	156531-09	4.60	156531-12	4.60	156531-0041	•	
FL 4x14	white	4.80	156532-00	5.20	156532-09					•	•
FL 4x28	white	8.50	156533-00	9.00	156533-09	8.50	156533-12	8.50	156533-0041	•	•

825 Comfort T8 - opal diffuser


		CEL		CEL-E		CEL-D		CELD-DIG		SHOOKS	PANELS
wattage	colour	weight	code	weight	code	weight	code	weight	code		
FL 2x18	white	3.40	156520-08							•	
FL 2x36	white	4.60	156521-08	5.00	156521-09	4.60	156521-12	4.60	156521-0041	•	
FL 4x18	white	4.80	156522-08	5.30	156522-09	4.80	156522-12	4.80	156522-0041	•	•
FL 4x36	white	8.50	156523-08	9.00	156523-09	8.50	156523-12	8.50	156523-0041	•	•

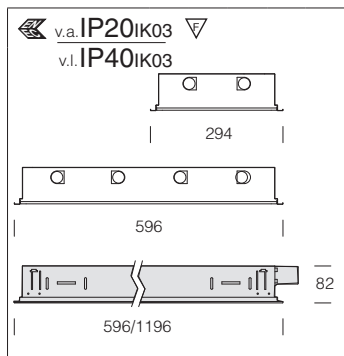

Housing/frame: made of sheet steel.

Diffuser: in opal plexiglass.

Supplied without brackets: for contact mounting directly on the cross T structure. When not contact mounted, (see page 28).

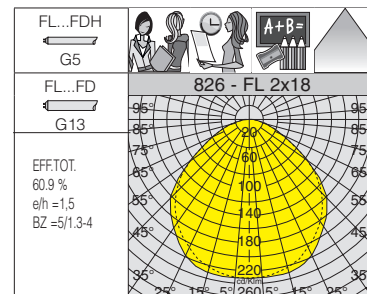

826 Comfort T5 - prismatic diffuser

		CELL		CELL-E		CELL-D		CELLD-DIG		SHOOKS	PANELS
wattage	colour	weight	code	weight	code	weight	code	weight	code		
FL 2x14	white	3.40	156630-00							•	
FL 2x28	white	4.60	156631-00	5.00	156631-09	4.60	156631-12	4.60	156631-0041	•	
FL 4x14	white	4.80	156632-00	5.20	156632-09					•	•
FL 4x28	white	8.50	156633-00	9.00	156633-09	8.50	156633-12	8.50	156633-0041	•	•

826 Comfort T8 - prismatic diffuser

		CEL		CEL-E		CEL-D		CELD-DIG		SHOOKS	PANELS
wattage	colour	weight	code	weight	code	weight	code	weight	code		
FL 2x18	white	3.40	156620-08							•	
FL 2x36	white	4.60	156621-08	5.00	156621-09	4.60	156621-12	4.60	156621-0041	•	
FL 4x18	white	4.80	156622-08	5.30	156622-09	4.80	156622-12	4.80	156622-0041	•	•
FL 4x36	white	8.50	156623-08	9.00	156623-09	8.50	156623-12	8.50	156623-0041	•	•