




**Housing/frame:** die-cast aluminium with cooling fins.

**Diffuser:** tempered glass 5 mm thick, resistant to impact and thermal shock (UNI7142 tests, British standard 3193).


**Coating:** graphite grey polyester powder coating, resistant to corrosive and saline environments.

**Electric gear:** 230V-50Hz power supply with heat protection. 2P+T terminal block (maximum allowed lead cross section 4 sqmm.)


**Equipment:** silicone rubber gasket. Fibreglass nylon cable gland, Ø 1/2 gas. Retained steel screws. Steel bracket with protractor scale. The hinged front frame stays attached to the housing for easy maintenance.




<b>acc. 334 pole attach. ø76</b>	
graphite	997916-00
Made of aluminium. To be used to apply the fixture on a ø 76 pole.	





<b>acc. 42 adjustable-angle arm</b>	
black	995504-00
Tropicalized steel painted by cationic electrocoating. <b>For art. Indio.</b>	



<b>acc. 333 pole attach. ø60</b>	
graphite	997915-00
Made of aluminium. To be used to apply the fixture on a ø 60 pole.	




<b>acc. 164 pole attachment</b>	
galvanized	998097
Made in galvanized steel. To be used to apply on a pole until 4 fixture ø60/ø76.	

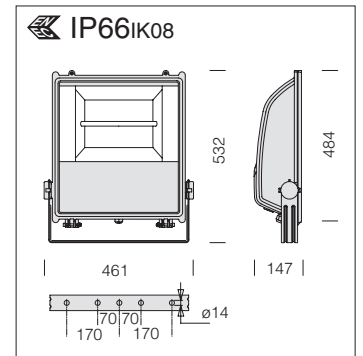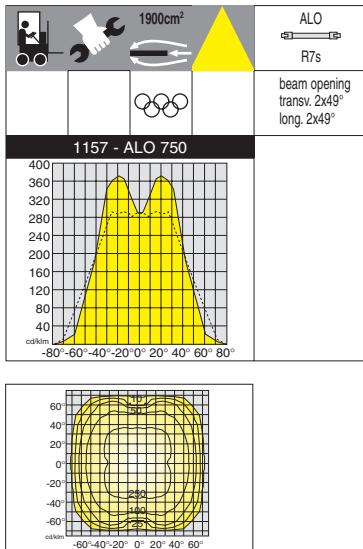


**Reflector:** symmetric or asymmetric, made of 3µ thick anodised and polished hammered aluminium 99.85.

1157 Indio			
		S	
wattage	colour	weight	code
ALO 750	graphite	7.60	413816-00




<b>acc. 71 baffle louver</b>	
black	995715-00
Made of steel. To reduce glare and improve light control.	




<b>acc. 73 protection guard</b>	
black	995716-00
Plastic-coated steel rod. For protection against impact.	


IP66IK08



**Reflector:** Symmetric or asymmetric, made of 3µ thick anodised and polished hammered aluminium 99.85.

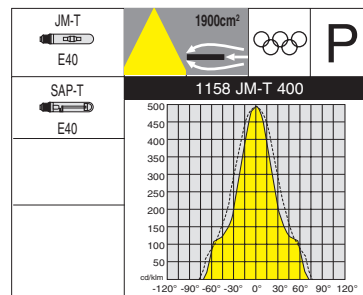

Example of bracket installation, acc. 164, using up to 4 floodlights.




**1158 Indio - symmetric**



wattage	colour	CNRL		Lamps (Ta=25°C)
		weight	code	Kelvin - ølm - Ra
SAP-T 150	graphite	10.40	414062-00	2000K - 15000lm - Ra 4
SAP-T 250	graphite	11.70	414063-00	2000K - 28000lm - Ra 4
SAP-T 400	graphite	13.10	414064-00	200 K - 48000lm - Ra 4
JM-T 250	graphite	10.60	414065-00	4500K - 20500lm - Ra 2b
JM-T 400	graphite	11.70	414066-00	4500K - 35000lm - Ra 2b
JM-T 250 FS	graphite	10.80	414067-00	4500K - 20500lm - Ra 2b
JM-T 400 FS	graphite	11.70	414068-00	4500K - 35000lm - Ra 2b

F.S.: narrow beam.

IP66IK08



**Reflector:** asymmetric 55° (efficiency 77%) made of 3µ thick 99.85 anodised and polished hammered aluminium.

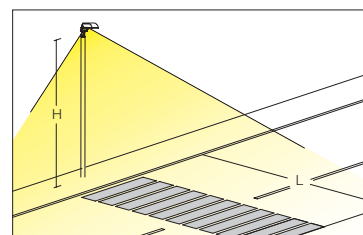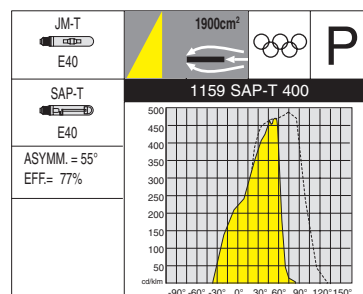

**1159 Indio - asymmetric**

wattage	colour	CNRL		Lamps (Ta=25°C)
		weight	code	Kelvin - ølm - Ra
SAP-T 150	graphite	10.40	414162-00	2000K - 15000lm - Ra 4
SAP-T 250	graphite	11.70	414163-00	2000K - 28000lm - Ra 4
SAP-T 400	graphite	13.10	414164-00	2000K - 48000lm - Ra 4
JM-T 250	graphite	10.60	414165-00	4500K - 20500lm - Ra 2b
JM-T 400	graphite	11.70	414166-00	4500K - 35000lm - Ra 2b

For lighting vertical walls and areas that require good glare control.