


Hot galvanised and painted steel poles. Complete with inspection window (239x94mm), with 4-pole and 16mm² maximum cross section removable terminal strip. With 2 16A rated protection fuses. Arranged with the power cable entry hole.

For the version with base, 4 log bolts to be sunk into the ground, bolts and lids have to be purchased.

Class II insulation as a standard feature. Attention is required when using fixtures with class I insulation since earthing connections must be foreseen.


N.B.: The possibility of combining a composition to the pole is subordinated to verifying the ability to withstand the wind force in the areas foreseen by the ENV 1991-2-4 standards. In accordance with the load assumptions foreseen in the EN 40-3-1 standards.



acc. 297 log bolts

426448-00


Log bolts are always to be used with the pole 1476.




acc. 223 base pole cover

s. silver 991379-00

Die-cast aluminium. To be used as base pole cover acc. 1505.

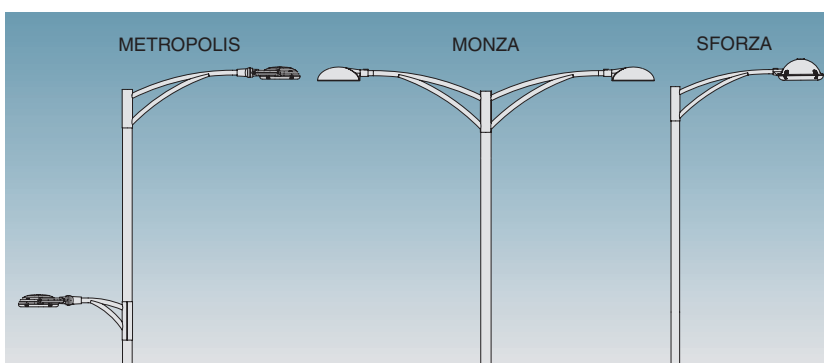

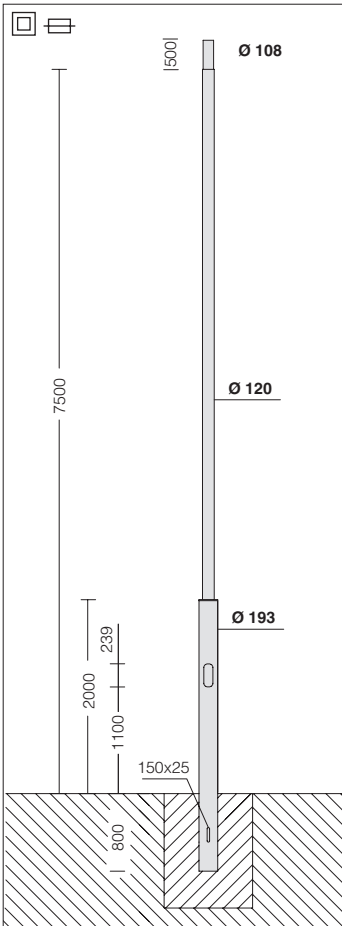

ON REQUEST
Possibility of supplying poles with the following colour paint finishes:
RAL 3003, 5011, 7026, 9011, 8015, 5002 7024, 7016, 7037, 6004, 8019, 6011, 7022, 1015, 9010.

Inspection door with easily removable terminal board for quick connection.


Concrete base dimensions (subject to soil variations)



acc. 1475 Aliante pole to be buried

colour	code								
silver	426185-00	8300	7500	800	1100	239	94	Ø 193	Ø 108

Supplied with holes to let the cables through. On request: cycle pathway versions with holes on different heights.

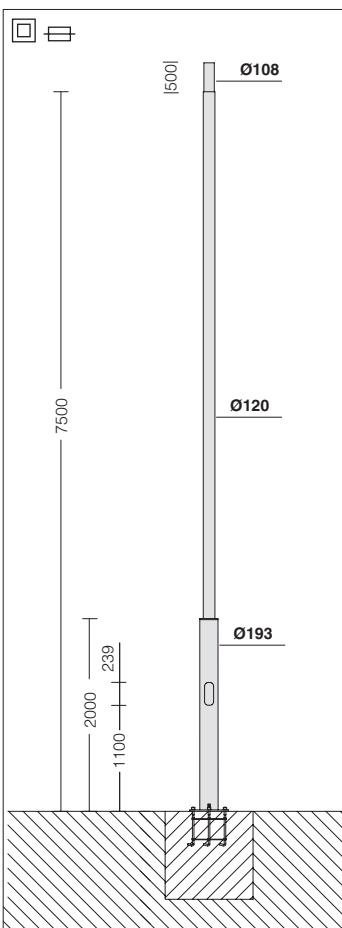

ON REQUEST
Possibility of supplying poles with the following colour paint finishes:
RAL 3003, 5011, 7026, 9011, 8015, 5002 7024, 7016, 7037, 6004, 8019, 6011, 7022, 1015, 9010.

Inspection door with easily removable terminal board for quick connection.

For correct installation of pole and base, the ceiling cap should be fitted as shown in the assembly drawing featured opposite

Concrete base dimensions (subject to soil variations)

acc. 1476 Aliante pole with base

colour	code								
silver	426195-00	7500	1100	239	94	Ø 193	Ø 108	Ø 400 hole Ø 20	

Supplied with holes to let the cables through. On request: cycle pathway versions with holes on different heights.
Log bolts are to be bought separately acc. 297.

