

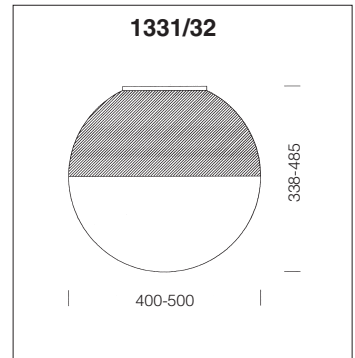
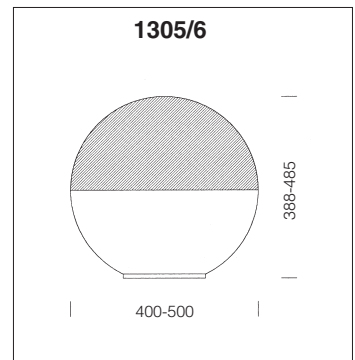


**Globes:** Vandal resistant, V2 self-extinguishing, UV-stabilised, anti-yellowing treated polycarbonate, injection moulded with a blowing process. These diffusers have optimum transparency for better transmission of the light flux. Available in different colours to change the light effect according to the specific environment. "Clear and cognac" colours/finishes are specifically recommended for installations with discharge lamps and accessories (e.g. shutter, etc.), while the "opal" colour/finish has wide-beam properties which reduce glare.

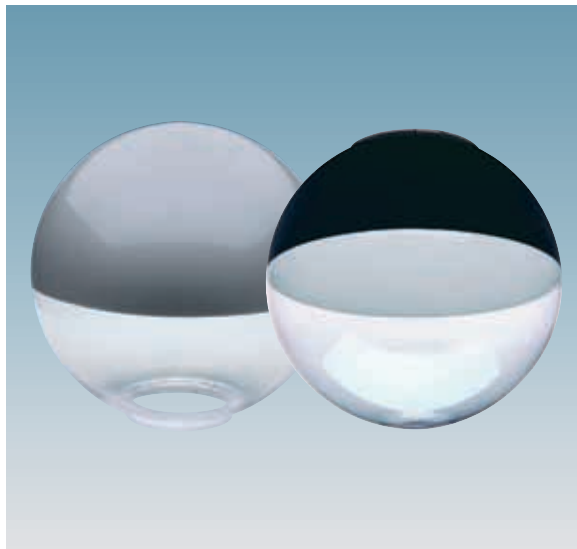

1300 TR			Max wattage recommended			
dim. ø	suitable for base	code	h globes	388	436	485
Ø 400	acc 1313-1320	425622-00	INC W	75	100	100
Ø 450	acc 1313-1320	425612-00	LM W	-	100	100
Ø 500	acc 1313-1320	425618-00	MBF W	80	125	125
1300 OP			SAP W	70	100	100
Ø 400	acc 1313-1320	425621-00	JM W	70	100	100
Ø 450	acc 1313-1320	425613-00	FLC W	2x18	2x18	2x18
Ø 500	acc 1313-1320	425619-00				
1300 CL			TR= Clear			
Ø 400	acc 1313-1320	425623-00	OP= Opal			
Ø 450	acc 1313-1320	425614-00	CL= Cognac			
Ø 500	acc 1313-1320	425620-00				

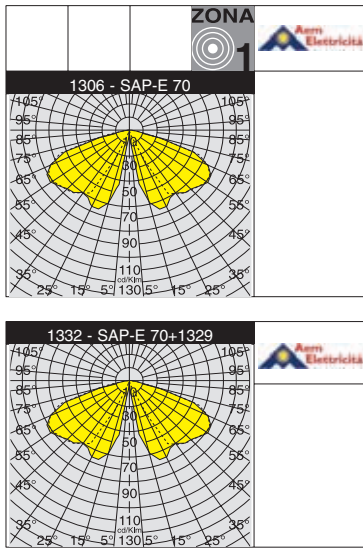

1305 Smooth silver globes			1306 Black globes		
dim. ø	suitable for base	code	dim. ø	suitable for base	code
Ø 400	acc 1330	425630-00	Ø 400	acc 1330	425635-00
Ø 500	acc 1330	425631-00	Ø 500	acc 1330	425636-00

To be used with base acc. 1330 and with louvre acc. 1328. Ø400=max70W - Ø500=max100W.  
On request: version with inside painted black (sub-code -0016).

1331 Smooth silver globes			1332 Black globes		
dim. ø	suitable for base	code	dim. ø	suitable for base	code
Ø 400	acc 1313	425640-00	Ø 400	acc 1313	425645-00
Ø 500	acc 1313	425641-00	Ø 500	acc 1313	425646-00

To be used with base acc. 1313 and with louvre acc. 1329. Ø400=max70W - Ø500 = MBF 125.  
On request: version with inside painted black (sub-code -0016)

**Painted globes:** same characteristics and materials as the globes, but the upper or lower part is painted in order to comply with the limits established by standard UNI 10819 against light pollution.

Ø:   
**INC 100:** 400/450/500   
**LM 100:** 450/500   
**FLC 25:** 450/500

IP65IK08



<b>acc. 1320 large base - S</b>	
0.60 <b>MAX 100</b>	426103-00
Anti-grip steel bolts with nut inside the base for higher mechanical resistance. E27 lampholder, pre-wired with silicone wiring	

Ø: **SAPE/JME70:** 400   
 Ø: **SAPE/JME100:** 500

IP65IK08



<b>acc. 1330 base for painted globes - CNRL</b>	
3.00 <b>SAP-E 70 x globe ø 400</b>	426280-00
3.00 <b>JM-E 70 x globe ø 400</b>	426281-00
3.10 <b>SAP-E100 x globe ø 500</b>	426282-00
3.10 <b>JM-E100 x globe ø 500</b>	426283-00

Ø60/76 pole mounting. To be used with globes acc. 1305/6+louvre 1328. Supplied with knife switch. With fuse holder on request.

<b>acc. 1313 aluminium base - CNRL</b>	
1.80 <b>FLC 2x18L</b>	426267-00

SAP-E50/70 - use lamps with built-in igniter. Black base and white nylon wiring container. Anti-grip steel bolts with nut inside the base. FLC version with nylon f. g. wiring container.

Ø: **FLC 18L:** 450/500

IP65IK08



<b>acc. 1313 aluminium base - S</b>	
1.60 <b>MAX 100</b>	426259-00

<b>acc. 1313 aluminium base - CNR</b>	
3.20 <b>MBF 80</b>	426261-00
3.40 <b>MBF 125</b>	426262-00
3.20 <b>SAP-E 70</b>	426264-00
3.50 <b>SAP-E 100</b>	426268-00

SAP-E50/70 - use lamps with built-in igniter. Black base and aluminium wiring container. For suspension attachment use acc. 1326 or acc. 1324

Ø: **INC 100:** 380/400/450/500   
**FLC25-LM100-MBF/SAP:** 450/500


IP65IK08



<b>acc. 1326 ceiling connection</b>	
50 cm	426250-00
100 cm	426251-00
150 cm	426252-00

Die-cast aluminium with steel tube painted by cationic electrocoating, with rough finish. It permits the suspension installation of bases acc. 1313.

Ø 201



<b>acc. 1324 suspension attachment for Globes</b>	
black	426236-00

Tropicalised steel painted by cationic electrocoating. For the suspension installation acc. 1313.

1300 TR - MBF 125 + acc.1314

Ø 165



<b>acc. 1314 louvre</b>		
<b>125</b> 388-485	aluminium	426257-00
Aluminium 99,85. Max125 version for acc.1313. Grey is the ideal colour for better lamp shielding.		

1300 TR - SAP-E 100 + acc.1329

174




<b>acc. 1329 louvre for zone 2 (UNI 10819)</b>		
<b>125</b>	aluminium	426276-00

Made of aluminium. To direct the luminous beam downwards when base acc. 1313 (max 125) is installed on a downward arm.

1300 TR - MBF125 + acc.1327

236




<b>acc. 1327 louvre for zone 2 (UNI 10819)</b>		
<b>125</b>	alum./black	426272-00

Made of aluminium. For diffuser installation in zone 2 environments.

1300 TR - MBF125 + acc.1328

236



<b>acc. 1328 louvre for zone 3 (UNI 10819)</b>		
<b>125</b>	aluminium	426274-00

Made of aluminium. For diffuser installation in zone 3 environments.

1300 TR - MBF125 + acc.1322

151



<b>acc. 1322 skirt</b>	
388-346	426202-00

Aluminium plate, painted white inside and black outside. To be applied between base and diffuser. Suitable for globes: art.1300 Ø400.