

**Housing:** rectangular in f.g. nylon, grey (RAL 7035), vandal resistant, UV-stabilised.

**Frame:** in thermoplastic material (adapted for exteriors) UV stabilised, RAL 7045 grey colour.




**Diffuser:** vandal resistant, V2 self-extinguishing polycarbonate.

**Electric gear:** 230V/50Hz power supply. Hard wire, 0.50 sqmm cross-section PVC-HT sheathing. 2P terminal block with maximum allowed lead cross-section of 2.5 sqmm.

**Equipment:** rubber gasket. With polycarbonate gear tray.

1606 Box 1			
		CNRL	
wattage	colour	weight	code
FLC 1x18L	grey	1.50	431630-00

Lamps: 4000K - 1200lm - Ra 1b

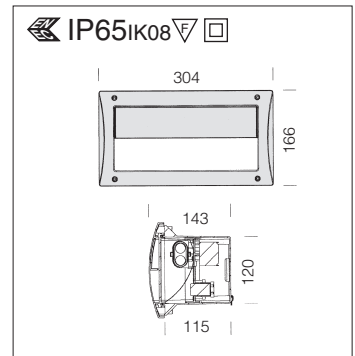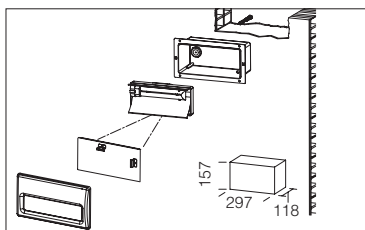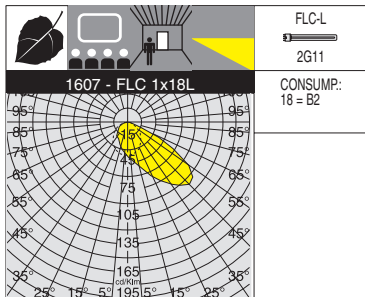

**Housing:** rectangular in f.g. nylon, grey (RAL 7035), vandal resistant, UV-stabilised.

**Frame:** in thermoplastic material (adapted for exteriors) UV stabilised, RAL 7045 grey colour.


**Reflector:** in scored asymmetric aluminium.

**Electric gear:** 230V/50Hz power supply. Hard wire, 0.50 sqmm cross-section PVC-HT sheathing. 2P terminal block with maximum allowed lead cross-section of 2.5 sqmm.

**Equipment:** rubber gasket. With polycarbonate gear tray.

1607 Box 1 - asymmetric eyelid diffuser			
		CNRL	
wattage	colour	weight	code
FLC 1x18L	grey	1.70	431730-00

Lamps: 4000K - 1200lm - Ra 1b

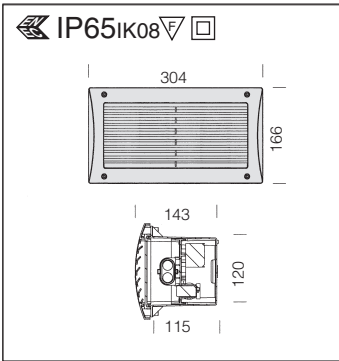

**Housing:** rectangular in f.g. nylon, grey (RAL 7035), vandal resistant, UV-stabilised.

**Frame:** in thermoplastic material (adapted for exteriors) UV stabilised, RAL 7045 grey colour with anti-glare louvre.




**Electric gear:** 230V/50Hz power supply. Hard wire, 0.50 sqmm cross-section PVC-HT sheathing. 2P terminal block with maximum allowed lead cross-section of 2.5 sqmm.

**Equipment:** rubber gasket. With polycarbonate gear tray.



1608 Box 1 - with louvre			
		CNRL	
wattage	colour	weight	code
FLC 1x18L	grey	1.90	431830-00

Lamps: 4000K - 1200lm - Ra 1b

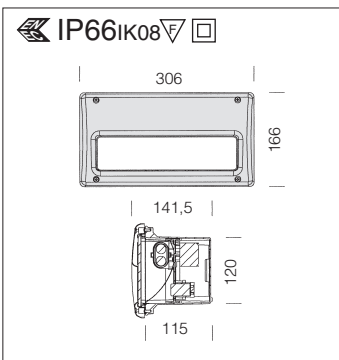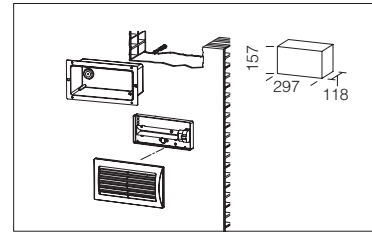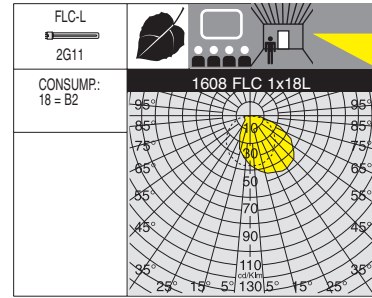

**Housing:** rectangular in f.g. nylon, grey (RAL 7035), vandal resistant.

**Frame:** in stainless steel AISI 316L.

**Diffuser:** tempered glass.

**Reflector:** in scored asymmetric aluminium.



**Electric gear:** 230V/50Hz power supply. Hard wire, 0.50 sqmm cross-section PVC-HT sheathing. 2P terminal block with maximum allowed lead cross-section of 2.5 sqmm.




**Equipment:** rubber gasket. With polycarbonate gear tray.



1609 Box 1 - stainless steel frame			
		CNRL	
wattage	colour	weight	code
FLC 1x18L	stainless steel	1.70	431765-00

In stainless steel **AISI 316L**. Ideal for seaside areas.  
Lamps: 4000K - 1200lm - Ra 1b

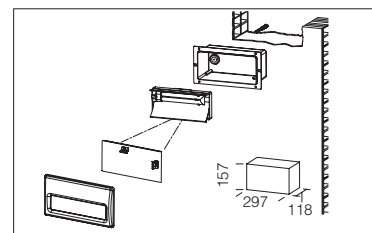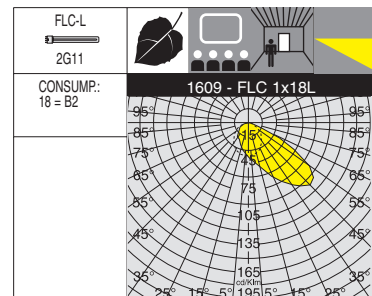

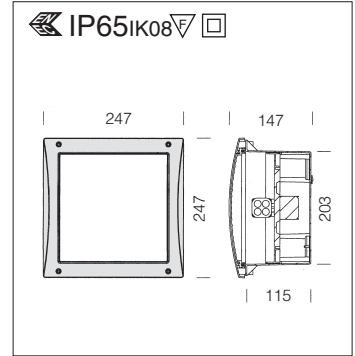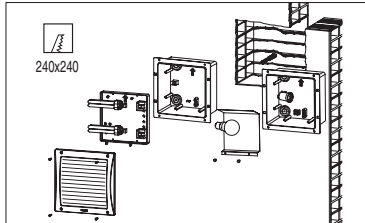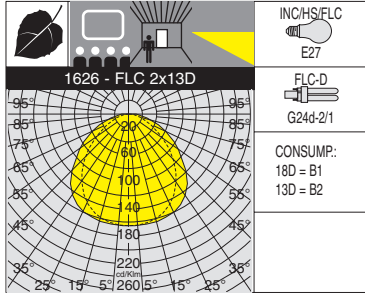

**Housing:** square in f.g. nylon, grey (RAL 7035), vandal resistant, UV-stabilised.

**Frame:** in thermoplastic material (adapted for exteriors) UV stabilised, RAL 7045 grey colour.




**Diffuser:** vandal resistant, V2 self-extinguishing. UV-stabilised polycarbonate.

**Electric gear:** 230V/50Hz power supply. Hard wire, 0.50 sqmm cross-section PVC-HT sheathing. 2P terminal block with maximum allowed lead cross-section of 2.5 sqmm.

**Equipment:** rubber gasket. With polycarbonate gear tray.

1626 - Box 2					
		S		CNRL	
wattage	colour	weight	code	weight	code
MAX 40	grey	1.80	431640-00		
FLC 1x18D	grey			2.00	431642-00
FLC 2x13D	grey			2.10	431643-00

Lamps: 4000K - 1200lm - Ra 1b

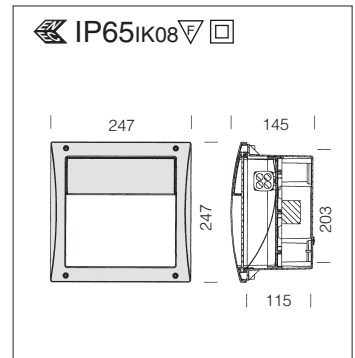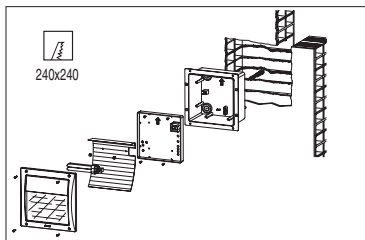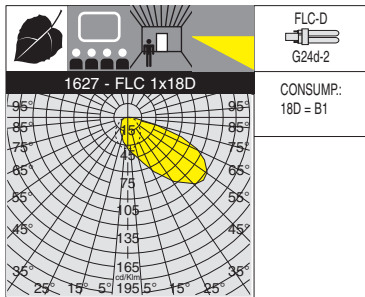

**Housing:** square in f.g. nylon, grey (RAL 7035), vandal resistant, UV-stabilised.

**Frame:** in thermoplastic material (adapted for exteriors) UV stabilised, RAL 7045 grey colour.

**Diffuser:** in clear polycarbonate.

**Reflector:** in scored asymmetric aluminium.


**Electric gear:** 230V/50Hz power supply. Hard wire, 0.50 sqmm cross-section PVC-HT sheathing. 2P terminal block with maximum allowed lead cross-section of 2.5 sqmm.

**Equipment:** rubber gasket. With polycarbonate gear tray.



1627 Box 2 - asymmetric eyelid diffuser					
		CNRL			
wattage	colour	weight	code		
FLC 1x18L	grey	2.20	431742-00		

Lamps: 4000K - 1200lm - Ra 1b

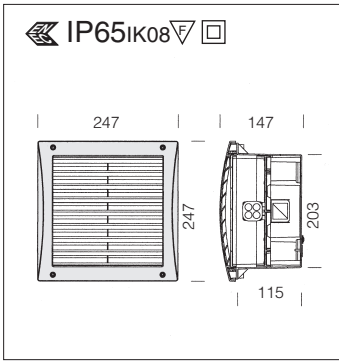

**Housing:** square in f.g. nylon, grey (RAL 7035), vandal resistant, UV-stabilised.

**Frame:** in thermoplastic material (adapted for exteriors) UV stabilised, RAL 7045 grey colour. With anti-glare louvre.




**Electric gear:** 230V/50Hz power supply. Hard wire, 0.50 sqmm cross-section PVC-HT sheathing. 2P terminal block with maximum allowed lead cross-section of 2.5 sqmm.

**Equipment:** rubber gasket. With polycarbonate gear tray.



1628 Box 2 - with louvre			
		CNRL	
wattage	colour	weight	code
FLC 1x18D	grey	2.20	431842-00
FLC 2x13D	grey	2.30	431843-00

Lamps: FLC 1x18D = 4000K - 1200lm - Ra 1b

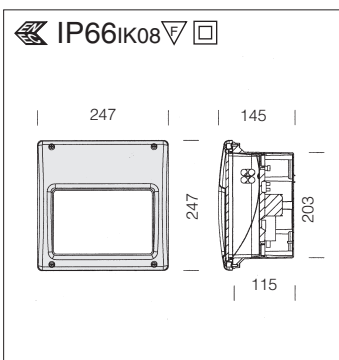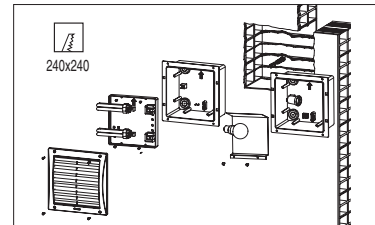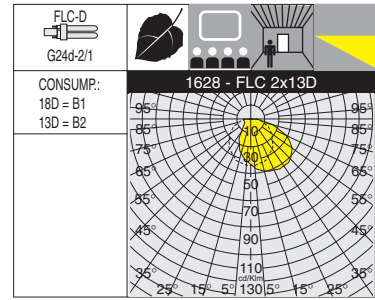

**Housing:** square in f.g. nylon, grey (RAL 7035), vandal resistant.

**Frame:** in stainless steel AISI 316L.

**Diffuser:** tempered glass.

**Reflector:** in scored asymmetric aluminium.

**Electric gear:** 230V/50Hz power supply. Hard wire, 0.50 sqmm cross-section PVC-HT sheathing. 2P terminal block with maximum allowed lead cross-section of 2.5 sqmm.

**Equipment:** rubber gasket. With polycarbonate gear tray.



1625 Box 2 - stainless steel			
		CNRL	
wattage	colour	weight	code
FLC 1x26D	stainless steel	2.50	431761-00

In stainless steel **AISI 316L**. Ideal for seaside areas.  
Lamps: 4000K - 1200lm - Ra 1b

