

730 - 36x1,4 - 130°		
0.5	Ø1.10 Ø2.19	3058
1.0	Ø2.19 Ø4.39	765
1.5	Ø3.29 Ø6.58	340
2.0	Ø4.39 Ø8.78	191
2.5	Ø5.48 Ø10.97	122
m	Ø6.57 Ø13.17	85lux



**Housing and frame:** made of sheet steel.


**Diffuser:** in frosted plexiglass.

**LED:** 36 power LED (1,4W max each one)



**Electric gear:** 100-240V Ac 47-63Hz; 140-370VDC.

**Working life:** 50000h ( from -30° to +70° C - Ta=25°C).

730 - Comfort ceiling fixture - Power LED						
		CTL		W tot	LED	
wattage 350mA	colour	weight	code		K	oIm 230V
1,2W white LED	white	5,20	142122-00	43,2W	6000K	2880 lm
<b>Upon request:</b> 4000K						

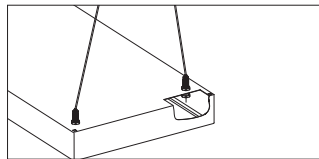

Suspension mount with wires. Acc. 2516 supplied separately.

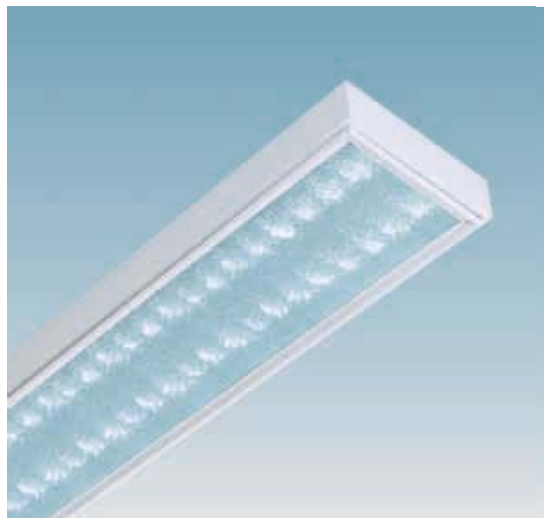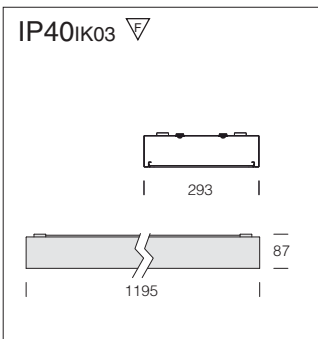

730 - 36x1,4 - 110°		
0.5	Ø1.10 Ø1.46	2881
1.0	Ø2.21 Ø2.91	720
1.5	Ø3.31 Ø4.37	320
2.0	Ø4.41 Ø5.82	180
2.5	Ø5.51 Ø7.28	115
m	Ø6.62 Ø8.73	80lux



**Housing and frame:** made of sheet steel.


**Diffuser:** in frosted plexiglass.

**LED:** 36 power LED (1,4W max each one).

**Electric gear:** 100-240V Ac 47-63Hz; 140-370VDC.

**Working life:** 50000h ( from -30° to +70° C - Ta=25°C).

730 - Comfort ceiling fixtures - Power LED						
		CTL		W tot	LED	
wattage 350mA	colour	weight	code		K	oIm 230V
1,2W white LED	white	5,20	142121-00	43,2W	6000K	2880 lm
<b>Upon request:</b> 4000K						

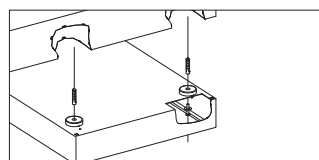

Ceiling mount application, accessory-free.