


IP67IK10





Housing: in die-cast aluminium.
Frame: in AISI 316L stainless steel.
Reflector: in hammered aluminium, anodically oxidized and polished, with anti-glare baffle.


1604 Floor - asymmetric in stainless steel AISI 316 L

wattage	colour	CNRL		temperature and load				Lamps (Ta=25°C)	
		weight	code	T. max on glass		Kg max load	walked*	trafficable*	Kelvin - ølm - Ra
				ta 25°C	ta 15°C				
SAP-TS 70	s. steel	6.00	530555-00	80°C	70°C	4000	OK	OK	2000K - 6800lm - Ra 4
JM-TS 70	s. steel	6.00	530556-00	80°C	70°C	4000	OK	OK	4000K - 5700lm - Ra 1b
FLC 1x26T	s. steel	5.00	530557-00	65°C	55°C	4000	OK	OK	4000K - 1800lm - Ra 1b

Ideal for installation in port areas.

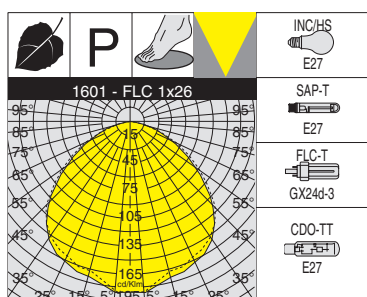

IP67IK10



Housing: in die-cast aluminium.
Frame: in AISI 316L stainless steel.
Reflector: in aluminium, anodically oxidized and polished.


1605 Floor - wide beam in stainless steel AISI 316 L

wattage	colour	S		CNRL		temperature and load			
		weight	code	weight	code	T. max on glass		Kg max load	walked*
						ta 25°C	ta 15°C		
MAX 40/FLC 15EL	s. steel	3.00	530560-00			*80°C	70°C	4000	OK
FLC 1x26T	s. steel			5.00	530567-00	65°C	55°C	4000	OK
SAP-T 50	s. steel			5.50	530569-00	110°C	100°C	4000	
CDO-TT 50	s. steel			5.50	530566-00	110°C	100°C	4000	

Ideal for installation in port areas.

* temperature referred for the lamp FLC 15L.


FLC 1x26T: 4000K - 1800lm - Ra 1b, SAP-T 50: 2000K - 3400lm - Ra 4; CDO-TT50 2800K - 4150lm - Ra 1b

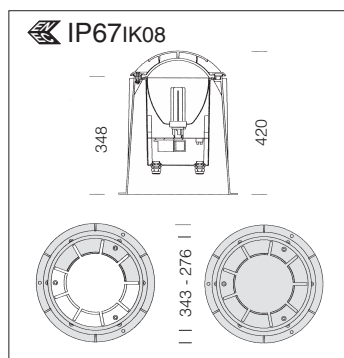

Housing/frame: in die-cast aluminium.

Reflector: in aluminium, anodically oxidized and polished.

Diffuser: impact and thermal shock resistant hemispherical die-cast aluminium.

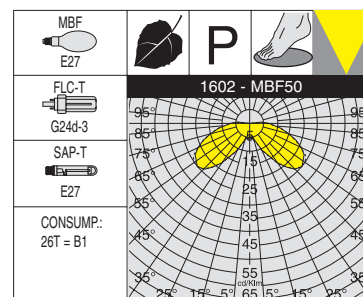


Art. 1644



1602 Floor - with convex screen and radial louvre frame									
		CNRL		temperature and load				Lamps (Ta=25°C)	
wattage	colour	weight	code	T. max on glass		Kg max load	walked*	trafficable*	Kelvin - ølm - Ra
				ta 25°C	ta 15°C				
FLC 1x26T	graphite	6.50	530574-00	55°C	45°C	2000	OK	OK	4000K - 1800lm - Ra 1b
SAP-T 50	graphite	7.00	530576-00	95°C	85°C	2000	OK	OK	2000K - 3400lm - Ra 4



1644 Floor - convex screen and radial louvre frame with one side closed									
		CNRL		temperature and load				Lamps (Ta=25°C)	
wattage	colour	weight	code	T. max on glass		Kg max load	walked*	trafficable*	Kelvin - ølm - Ra
				ta 25°C	ta 15°C				
FLC 1x26T	graphite	6.50	530561-00	55°C	45°C	2000	OK	OK	4000K - 1800lm - Ra 1b
SAP-T 50	graphite	7.00	530563-00	95°C	85°C	2000	OK	OK	2000K - 3400lm - Ra 4

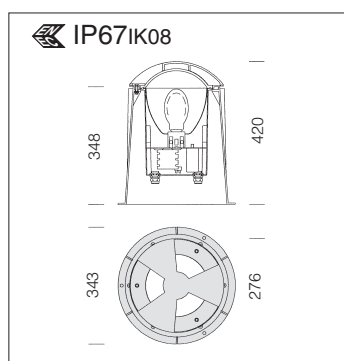

Housing/frame: in die-cast aluminium.

Reflector: in aluminium, anodically oxidized and polished.

Diffuser: impact and thermal shock resistant hemispherical die-cast aluminium.

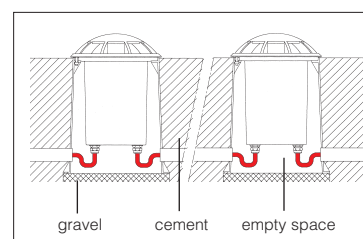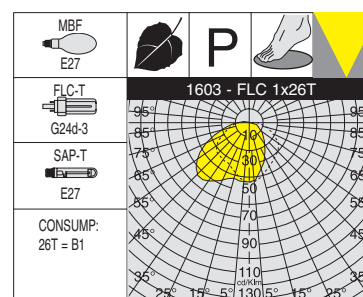

1603 Floor - with convex screen and frame for localized lighting									
		CNRL		temperature and load				Lamps (Ta=25°C)	
wattage	colour	weight	code	T. max on glass		Kg max load	walked*	trafficable*	Kelvin - ølm - Ra
				ta 25°C	ta 15°C				
FLC 1x26T	graphite	6.50	530544-00	60°	50°	2000	OK	OK	4000K - 1800lm - Ra 1b
SAP-T 50	graphite	7.00	530546-00	95°	85°	2000	OK	OK	2000K - 3400lm - Ra 4

FLC 1x26T: 4000K - 1800lm - Ra 1b,

MBF 50: 4200K - 2000lm - Ra 3,

SAP-T 50: 2000K - 3400lm - Ra 4