





Housing: High-temperature resistant thermoplastic material. Supplied with a sphere-opal polycarbonate cone diffuser.

Lampholder: Polycarbonate with phosphorous bronze contacts.

Electric gear: 230V-50Hz power supply 0.75 sqmm cross section 2-pole wire 2P terminal block (maximum allowed lead cross section 2.5 mm²).


Regulations: Manufactured in accordance with EN 60598-CEI 34-21 standards. Degree of protection in accordance with EN 60529 standards.



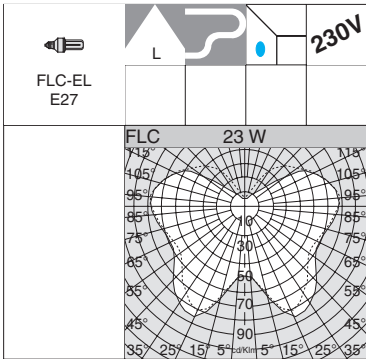
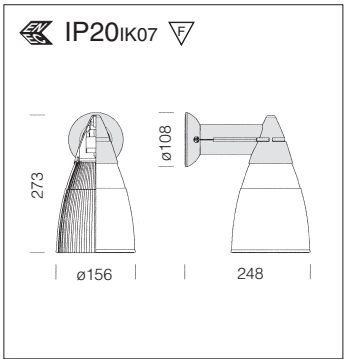


Argostar wall version			
		S	
wattage	colour	weight	code
FLC-EL max23	m. silver	0,60	22040275-00
Without coloured ring.			



Coloured ring	
white	22091811-00
red	22091822-00
green	22091843-00
yellow	22091854-00
blue	22091885-00
Coloured finishing ring to be fitted to the opal cone. To be used only when the reflector is oriented downwards.	

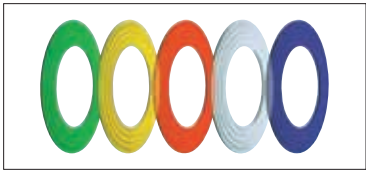

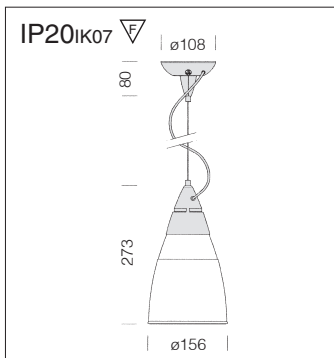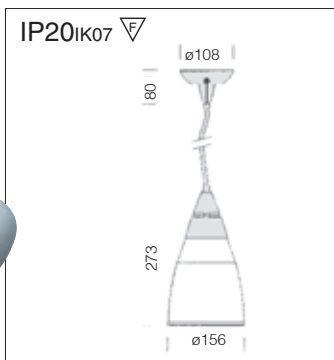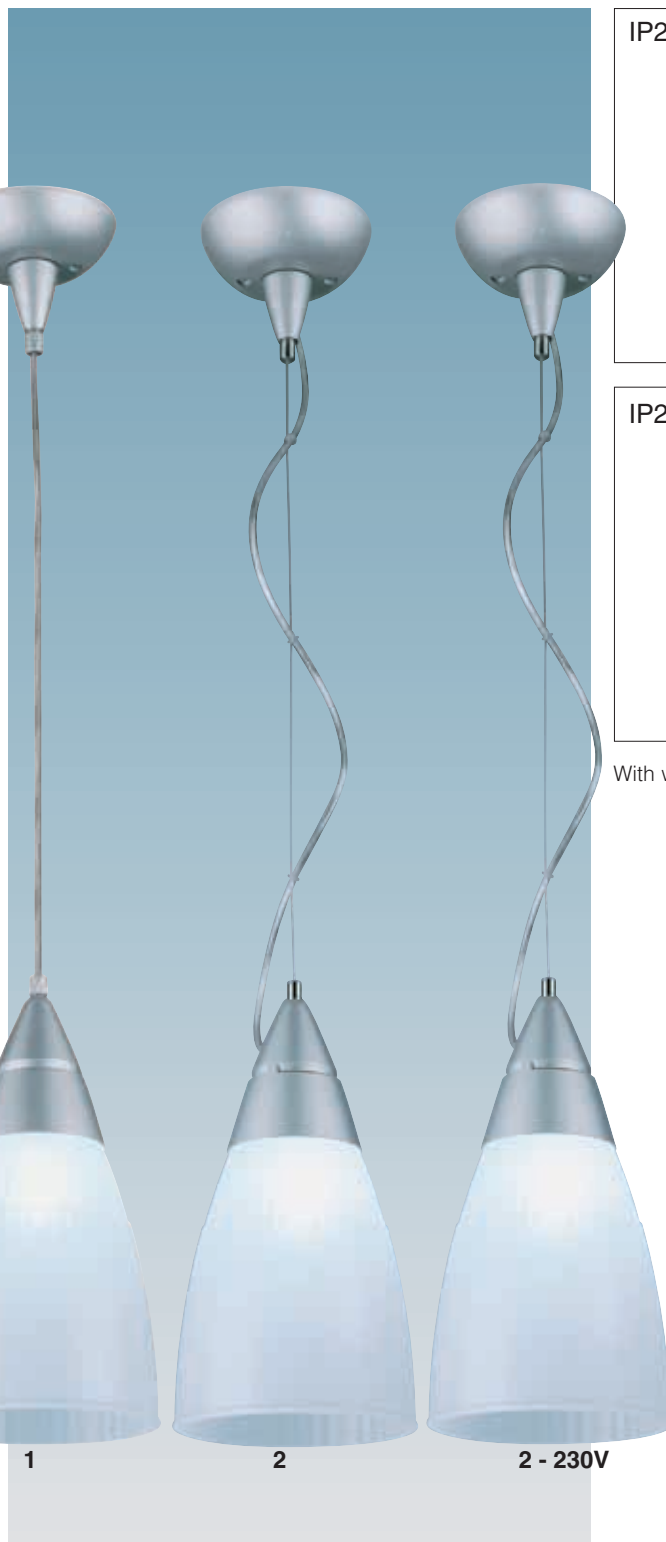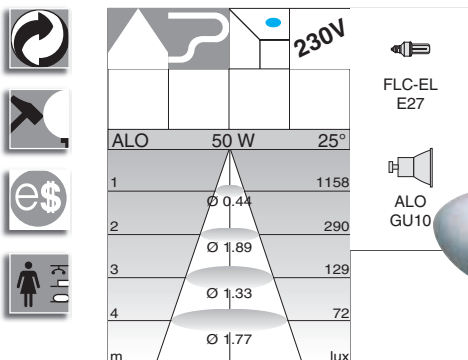

With wire L = 1.50 m.

Argostar 1 suspension with wire

		S	
wattage	colour	weight	code
FLC-EL max23	m. silver	0,80	22070072-00



Without coloured ring. With wire L = 1.50 m.

Argostar 2 suspension with wire


		S		CNL Version 230V		Lamps (Ta=25°C)
wattage	colour	weight	code	weight	code	Kelvin - h - Ølm - Ra
FLC-EL max23	m. silver	0,80	22070073-00			
ALU 50	m. silver			0,80	22070074-00	3000K - 900 lm - 1b

Without coloured ring. With wire L = 1.50 m.

Version equipped with a 230V lamp, mains voltage operated without transformer. Available on request chrome Argostar 2 code 22070075-00.

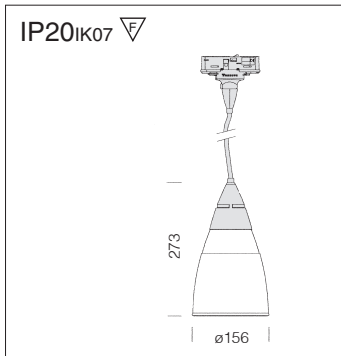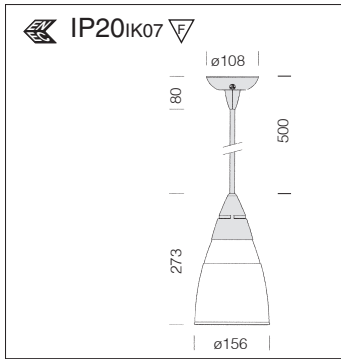

With wire L = 1.50 m.

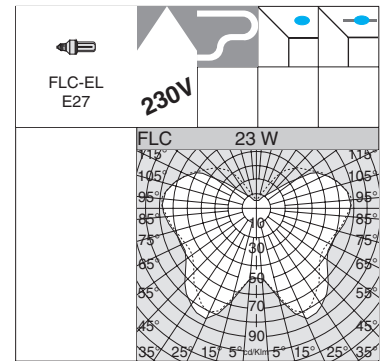

Argostar 3 with rods			
		S	
wattage	colour	weight	code
FLC-EL max23	m. silver	1,00	22070071-00

Without coloured ring.

Argostar 4 suspension			
		S	
wattage	colour	weight	code
FLC-EL max23	m. silver	0,70	22070174-00

Without coloured ring. With wire L = 1.50 m.