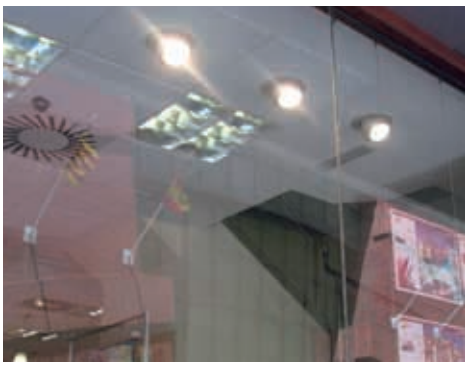

Thanks to its extreme versatility, Compendio includes recessed mounting among its installation options. Multi-recessed version also available.

Housing: Die-cast aluminium, with gear box encased inside the structure.

Diffuser: Clear tempered glass.
Coating: Fluid-coated with a UV-stabilised acrylic-resin paint.

Power supply: With separate electric gear box equipped with plug socket connector. When the optic unit compartment rotates, the port is closed by a plate that dissipates the heat.

Lamps: Supplied with AR111 Mastercolour or halogen lamps. This version requires no additional accessories to be installed individually or SDW for warm colours; SPOTLED and LED RGB.

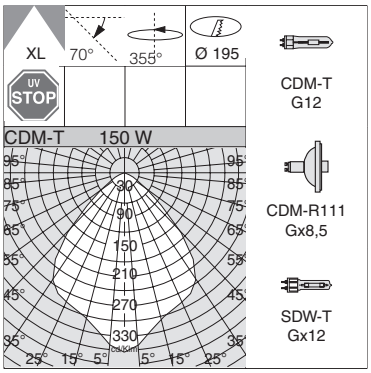

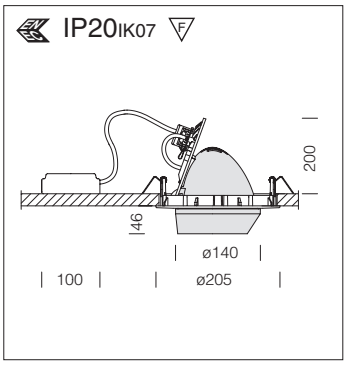

Reflector: For Mastercolour lamp, made of oxidised and polished aluminium 99.85.

Compendio 1

		CELL		Lamps (Ta=25°C)
wattage	colour	weight	code	Kelvin - ølm - Ra
CDM-T 35	m. silver	1,50	220**89570-08**	3000K - 3300 lm - Ra 1b
CDM-T 70	m. silver	1,50	220**89571-08**	3000K - 6600 lm - Ra 1b
CDM-T 150	m. silver	1,80	220**89572-08**	3000K - 14000 lm - Ra 1b
CDM-T 35	white	1,50	220**89510-08**	3000K - 3300 lm - Ra 1b
CDM-T 70	white	1,50	220**89511-08**	3000K - 6600 lm - Ra 1b
CDM-T 150	white	1,80	220**89512-08**	3000K - 14000 lm - Ra 1b
CDM-R111 70	white	1,50	220**89514**-00	3000K - 15000 cd - Ra 1b
CDM-R111 70	m. silver	1,50	220**89574**-00	3000K - 15000 cd - Ra 1b
SDW-T 50	m. silver	1,50	220**89573**-00	2500K - 2300 lm - Ra 1b

IP20IK07



Complete with gear box with transformer. Version upon request with lamp ALO25 dimmable G9 connection. Operation to mains voltage.

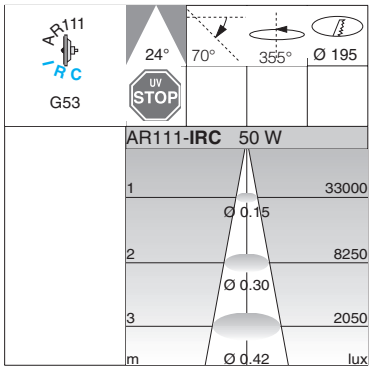

Compendio 2

		CTL		Lamps (Ta=25°C)
wattage	colour	weight	code	Kelvin - ølm - Ra
AR111-IRC 50	m. silver	1,20	220**89673**-00	3000K - 5800 cd - 4000h
AR111-IRC 65	m. silver	1,20	220**89674**-00	3000k - 8500 cd - 4000h

IP20IK07



Equipped with SpotLED111 lamp, 7 LED lights, 12W, and electromechanical transducer. The lamp beam has a 360° rotation.
The LED lights do not come with ultraviolet and infrared components.

Version with led **RGB** on request.



Compendio LED

		CLD CELL		LED (Ta=25°C)			
wattage	colour	weight	code	W tot.	K	ølm	degrees
SPOTLED111 12W	m. silver	1,50	220**89575**-00		4200	765	26°
SPOTLED111 12W	m. silver	1,50	220**89576**-00		4200	765	10°

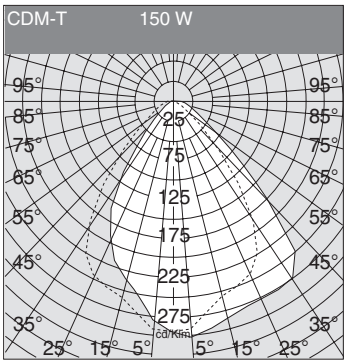



Conveyor

2200**5477**-00

To convey the light beam in one direction.

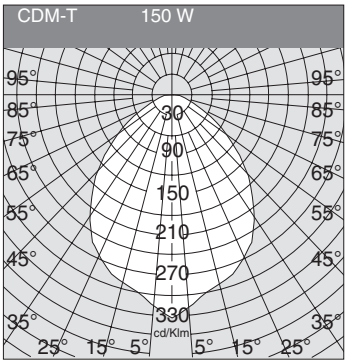

Printed glass

2200**5486**-00

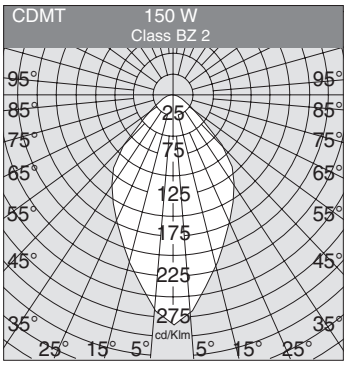

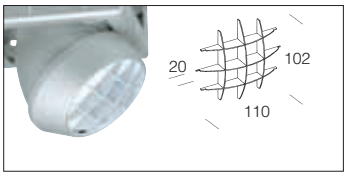

Baffle louvre

2200**5478**-00

Made of steel. To reduce glare effects and direct the light beam.

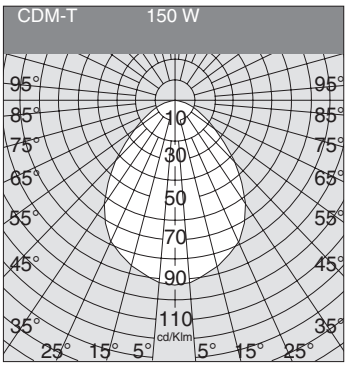

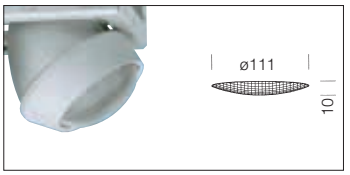

Mesh to dissipate heat

2200**5493**-00

According to regulations, the use of a mesh, at a distance of 0.80 metres, produces a temperature decrease of 20°C.

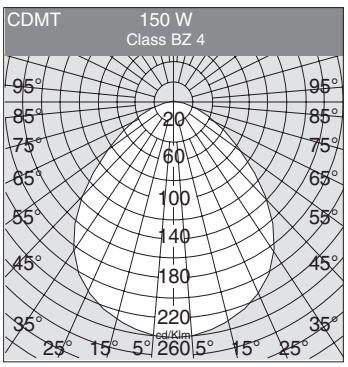

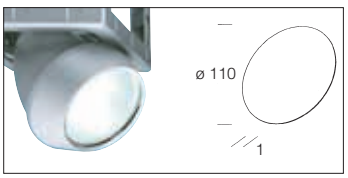

Matt glass

2200**5489**-00

Anti-glare wide-beam matt glass.

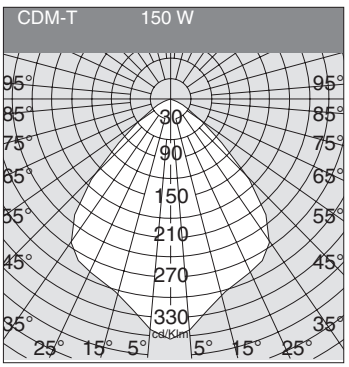

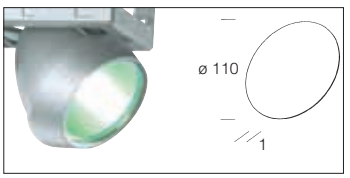

Coloured filter	
red	2200**5480**-00
yellow	2200**5481**-00
blue	2200**5482**-00

Coloured glass with dichroic treatment. Designed to create evocative light effects.

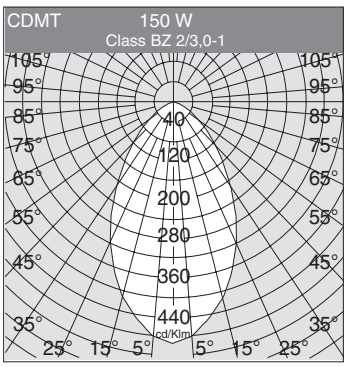

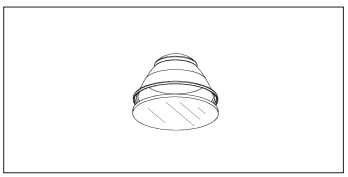

Medium reflector

2200**5487**-00

Medium optical system. Equipped with clear glass. Replaces standard optic unit if required.

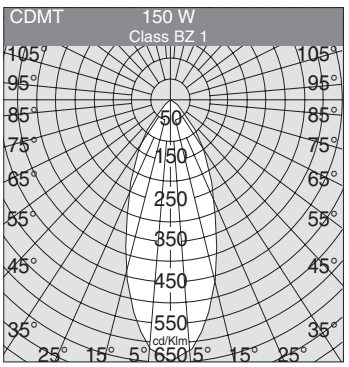

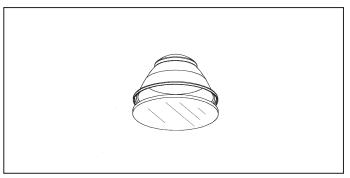

Narrow-beam reflector

2200**5488**-00

Narrow-beam optical system. Equipped with clear glass. Replaces standard optic unit if required.

INSTALLATION ON SHOOKS

power W	A	B	H	C	D	100	100	200
2 holes	294	596	35	271	573	•	•	•
3 holes	294	1196	35	271	1173	•	•	•
4 holes	596	596	35	573	573	•	•	•

INSTALLATION ON PANELS

power W	A	B	H	C	D	600x600	600x1200
2 holes	294	596	35	271	573	•	
3 holes	294	1196	35	271	1173		•
4 holes	596	596	35	573	573	•	

Multi-recessed ceiling fixture to be completed with Compendio floodlight. Features attachments for the use of chains, steel cable and tension rods for installation. The gear box included in the supply can be positioned onto the false ceiling or the fixture's housing.

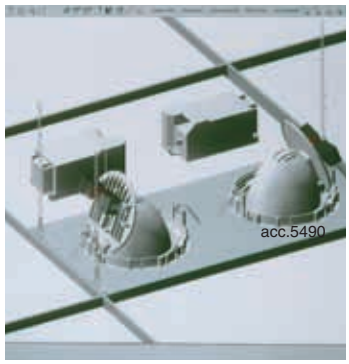

Installation in false ceilings made from HD84C type shooks with covered joints



Installation on panelled false ceilings with 600 modules.



The lamp housing can be rotated 0-355°



The lamp housing can be tilted 0-60°/70°



2-fixture multi-recessed		
2-hole ceiling fixture	m. silver	2200**5490**-00
2-hole ceiling fixture	white	2200**5495**-00
To be used together with Compendio recessed spotlight.		

IP20IK08



3-fixture multi-recessed		
3-hole ceiling fixture	m. silver	2200**5491**-00
3-hole ceiling fixture	white	2200**5496**-00
To be used together with Compendio recessed spotlight.		

4-fixture multi-recessed		
4-hole ceiling fixture	m. silver	2200**5492**-00
4-hole ceiling fixture	white	2200**5497**-00
To be used together with Compendio recessed spotlight.		

IP20IK08