



Housing: in extruded aluminium, oxidized.



End cap: In die-cast aluminium, coated with exterior polyester paint.

Diffuser: made in glass.

LED: supplied with "neutral white" LEDs, 10°. On request: 24° and 40° beam angle.


Power supply: integrated at 220-240v 50hz.

Equipment: 3x0.75mmq pvc cable, 2.5 m.

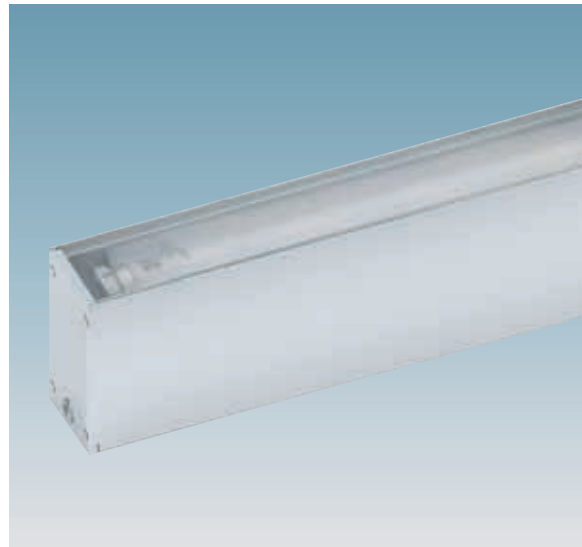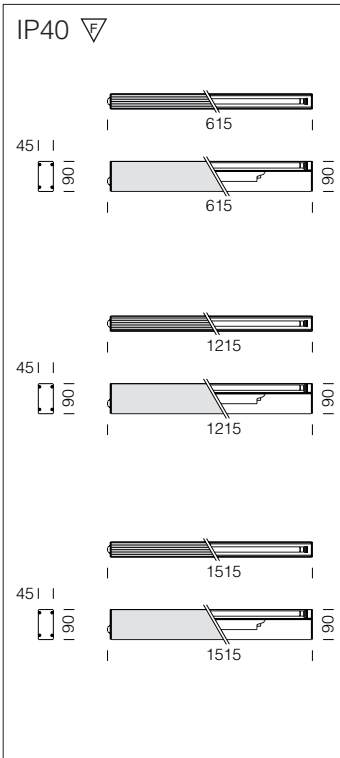

Maxi LISET					
		CELL		Lamps (Ta=25°C)	
Wattage	colour	L	code	w tot	Kelvin - ølm - Ra
FL 1x24	nat. oxidized al.	615	22019072-00	24W	4000 - 1750 - Ra 1b
FL 1x54	nat. oxidized al.	1215	22019075-00	54W	4000 - 4450 - Ra 1b
FL 1x49	nat. oxidized al.	1515	22019074-00	49W	4000 - 4300 - Ra 1 b

On request: IP54 version

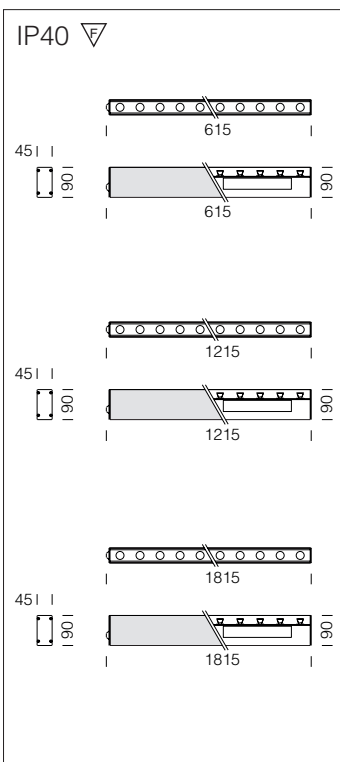


Maxi LISET					
		CLD CELL		LED (Ta=25°C)	
Wattage	colour	L	code	w tot	K - 350mA
10x1,2W LED white	nat. oxidized al.	615mm	22019171-00	14	4100 - 80
20x1,2W LED white	nat. oxidized al.	1215mm	22019172-00	28	4100 - 80
30x1,2W LED white	nat. oxidized al.	1815mm	22019173-00	36	4100 - 80


On request: versions with colored LED; versions with n° 6 LED x 1,4W and n° 4 x 1,4W. versions with n° 12 LED x 1,2W and n° 8 x 1,2W. On request: IP54 version



The LED lights used for these products consume 15W per linear metre, with a Ra coloration over 90 (92-96). Higher power efficiency can be obtained if necessary, but the Ra goes down to 75 (does not apply to the RGB version).

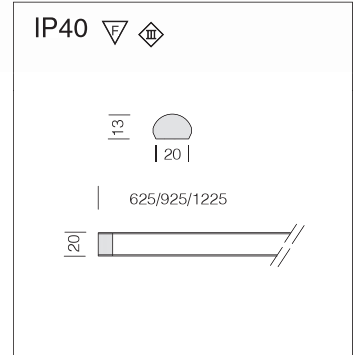

Micro Liset fixed 3200K					
		CLD S+L			LED (Ta=25°C)
wattage	colour	dim.	code	W tot	24V
12x0,25W LED white	natural oxi.alum.	625	22017870-00	3	Complete with LED WHITE of 0,25W. Ra 96
18x0,25W LED white	natural oxi.alum.	925	22017871-00	4,5	
24x0,25W LED white	natural oxi.alum.	1225	22017872-00	6	
18x0,25W LED white	natural oxi.alum.	625	22017670-00	4,5	
27x0,25W LED white	natural oxi.alum.	925	22017671-00	6,75	
36x0,25W LED white	natural oxi.alum.	1225	22017672-00	9	
36x0,25W LED white	natural oxi.alum.	625	22017270-00	9	
54x0,25W LED white	natural oxi.alum.	925	22017271-00	13,5	
72x0,25W LED white	natural oxi.alum.	1225	22017272-00	18	

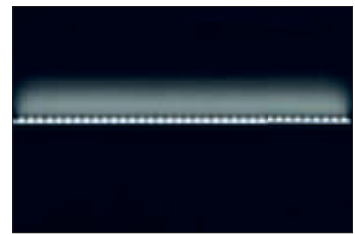


Art. Microliset cod. 22017672-00 3200K beam.

Micro Liset fixed 5500K					
		CLD S+L			LED (Ta=25°C)
wattage	colour	dim.	code	W tot	24V
12x0,25W LED white	natural oxi.alum.	625	22017875-00	3	Complete with LED WHITE of 0,25W. Ra 92
18x0,25W LED white	natural oxi.alum.	925	22017876-00	4,5	
24x0,25W LED white	natural oxi.alum.	1225	22017877-00	6	
18x0,25W LED white	natural oxi.alum.	625	22017675-00	4,5	
27x0,25W LED white	natural oxi.alum.	925	22017676-00	6,75	
36x0,25W LED white	natural oxi.alum.	1225	22017677-00	9	
36x0,25W LED white	natural oxi.alum.	625	22017275-00	9	
54x0,25W LED white	natural oxi.alum.	925	22017276-00	13,5	
72x0,25W LED white	natural oxi.alum.	1225	22017277-00	18	




Art. Microliset cod. 22017677-00 5500K beam.


Micro Liset fixed 4100K					
		CLD S+L			LED (Ta=25°C)
wattage	colour	dim.	code	W tot	24V
12x0,33W LED white	natural oxi.alum.	625	22017873-00	4	Complete with LED WHITE of 0,33W. Ra 75
18x0,33W LED white	natural oxi.alum.	925	22017874-00	6	
24x0,33W LED white	natural oxi.alum.	1225	22017878-00	8	
18x0,33W LED white	natural oxi.alum.	625	22017673-00	6	
27x0,33W LED white	natural oxi.alum.	925	22017674-00	9	
36x0,33W LED white	natural oxi.alum.	1225	22017678-00	12	
36x0,33W LED white	natural oxi.alum.	625	22017273-00	12	
54x0,33W LED white	natural oxi.alum.	925	22017274-00	18	
72x0,33W LED white	natural oxi.alum.	1225	22017278-00	24	

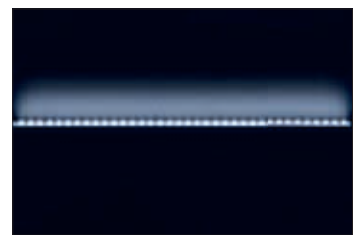

Art. Microliset cod. 22017678-00 4100K beam.

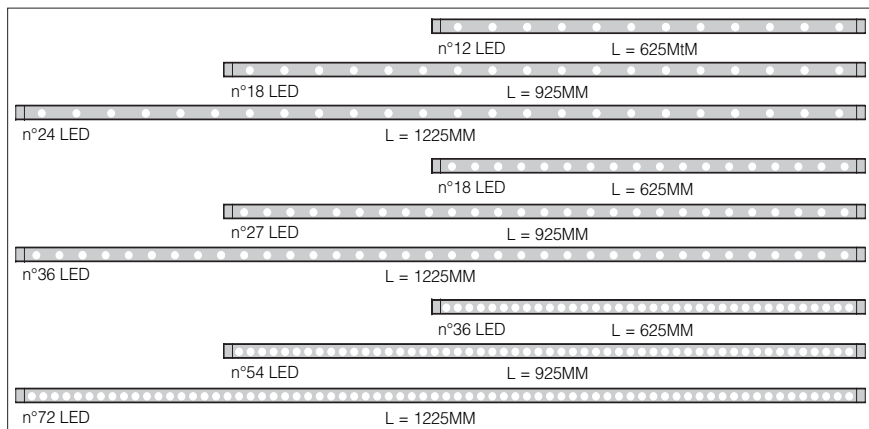

IP20 box for Microliset	
220-240V - 24V DC 70W	22092022-00
220-240V - 24V DC 20W	22090839-00
Dimmable power supply for Microliset	
1-10V - 24V DC 20W	22090840-00
dim. DALI 20W	22090846-00
Dimmable interface for Microliset	
1-10V in 24 DC out 24 DC 120W	22090841-00

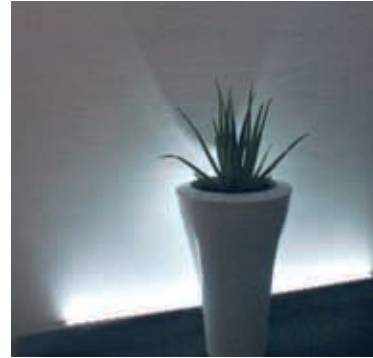

The LED lights used for these products consume 15W per linear metre, with a Ra coloration over 90 (92-96). Higher power efficiency can be obtained if necessary, but the Ra goes down to 75 (does not apply to the RGB version).



Art. Microliset cod. 22017372-00 3200K beam.



Art. Microliset cod. 22017377-00 5500K beam.




Art. Microliset cod. 22017378-00 4100K beam.

Micro Liset adjustable 3200K					
wattage	colour	CLD S+L			LED (Ta=25°C)
		dim.	code	W tot	24V
12x0,25W LED white	natural oxi.alum.	655	22017970-00	3	Complete with LED WHITE of 0,25W. Ra 96
18x0,25W LED white	natural oxi.alum.	955	22017971-00	4,5	
24x0,25W LED white	natural oxi.alum.	1255	22017972-00	6	
18x0,25W LED white	natural oxi.alum.	655	22017770-00	4.5	
27x0,25W LED white	natural oxi.alum.	955	22017771-00	6.75	
36x0,25W LED white	natural oxi.alum.	1255	22017772-00	9	
36x0,25W LED white	natural oxi.alum.	655	22017370-00	9	
54x0,25W LED white	natural oxi.alum.	955	22017371-00	13.5	
72x0,25W LED white	natural oxi.alum.	1255	22017372-00	18	



Micro Liset adjustable 5500K					
wattage	colour	CLD S+L			LED (Ta=25°C)
		dim.	code	W tot	24V
12x0,25W LED white	natural oxi.alum.	655	22017975-00	3	Complete with LED WHITE of 0,25W. Ra 92
18x0,25W LED white	natural oxi.alum.	955	22017976-00	4,5	
24x0,25W LED white	natural oxi.alum.	1255	22017977-00	6	
18x0,25W LED white	natural oxi.alum.	655	22017775-00	4.5	
27x0,25W LED white	natural oxi.alum.	955	22017776-00	6.75	
36x0,25W LED white	natural oxi.alum.	1255	22017777-00	9	
36x0,25W LED white	natural oxi.alum.	655	22017375-00	9	
54x0,25W LED white	natural oxi.alum.	955	22017376-00	13.5	
72x0,25W LED white	natural oxi.alum.	1255	22017377-00	18	

Micro Liset adjustable 4100K					
wattage	colour	CLD S+L			LED (Ta=25°C)
		dim.	code	W tot	24V
12x0,33W LED white	natural oxi.alum.	655	22017973-00	4	Complete with LED WHITE of 0,33W. Ra 75
18x0,33W LED white	natural oxi.alum.	955	22017974-00	6	
24x0,33W LED white	natural oxi.alum.	1255	22017978-00	8	
18x0,33W LED white	natural oxi.alum.	655	22017773-00	6	
27x0,33W LED white	natural oxi.alum.	955	22017774-00	9	
36x0,33W LED white	natural oxi.alum.	1255	22017778-00	12	
36x0,33W LED white	natural oxi.alum.	655	22017373-00	12	
54x0,33W LED white	natural oxi.alum.	955	22017374-00	18	
72x0,33W LED white	natural oxi.alum.	1255	22017378-00	24	


IP20 box for Microliset	
220-240V - 24V DC 70W	22092022-00
220-240V - 24V DC 20W	22090839-00
Dimmable power supply for Microliset	
1-10V - 24V DC 20W	22090840-00
dim. DALI 20W	22090846-00
Dimmable interface for Microliset	
1-10V in 24 DC out 24 DC 120W	22090841-00

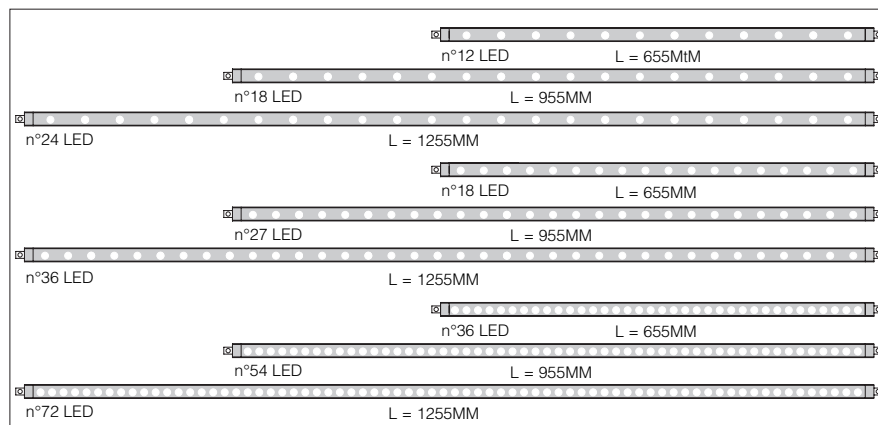



The LED lights used for these products consume 15W per linear metre, with a Ra coloration over 90 (92-96). Higher power efficiency can be obtained if necessary, but the Ra goes down to 75 (does not apply to the RGB version). On request: IP54 version.
For information please go to www.fosnova.it

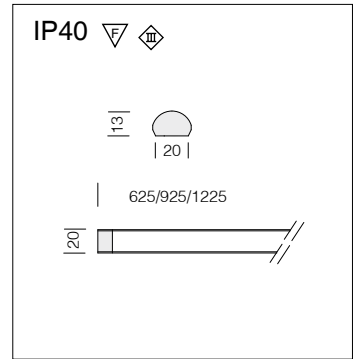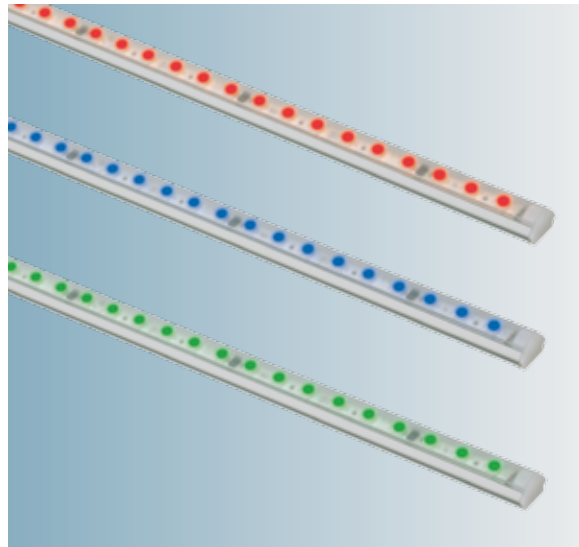


		Micro Liset fixed RGB			LED (Ta=25°C)
		CLD S+L			K - ølm 24V
wattage/W	colour	L	code	W tot	Complete with LED RGB of 0,25W.
18x0,25W LED RGB	natural oxi.alum.	625	22017680-00	4.5	
24x0,25W LED RGB	natural oxi.alum.	855	22017681-00	6.75	
36x0,25W LED RGB	natural oxi.alum.	1225	22017682-00	9	
36x0,25W LED RGB	natural oxi.alum.	625	22017280-00	9	
54x0,25W LED RGB	natural oxi.alum.	925	22017281-00	13.5	
72x0,25W LED RGB	natural oxi.alum.	1225	22017282-00	18	

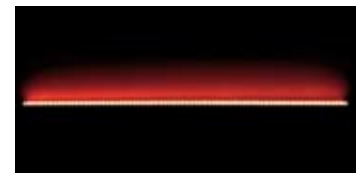

Art. Microliset cod. 22017282-00 beam.

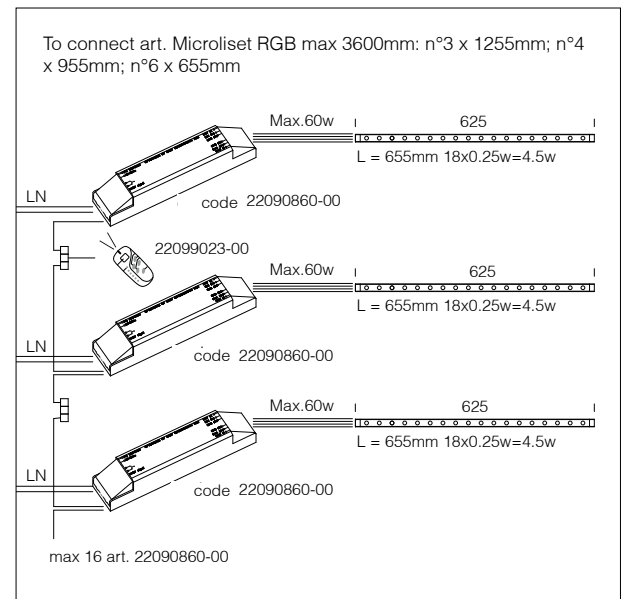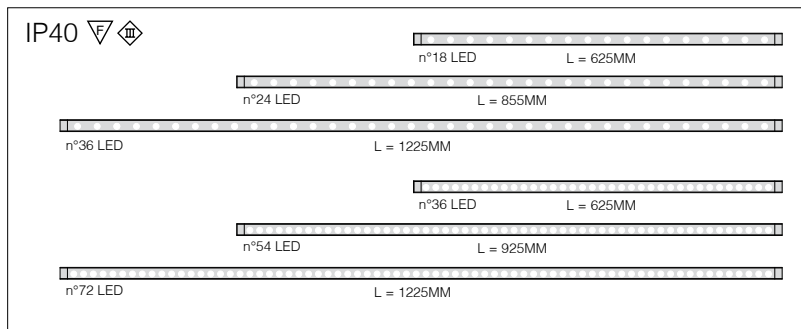

Bracket for fixed Microliset	
transp. poly.	22025972-00
To be used with Micro Liset	







DMX controller for Microliset RGB
22090861-00
Max 48W for canal

Power supply and connector for Microliset RGB
22090860-00

Remote control for receiver IRE
22099023-00
Control for a distance of up to 10/15 m.




IRE for Microliset
22099050-00

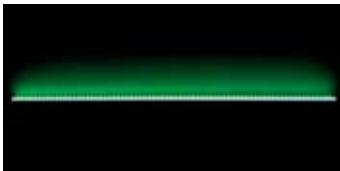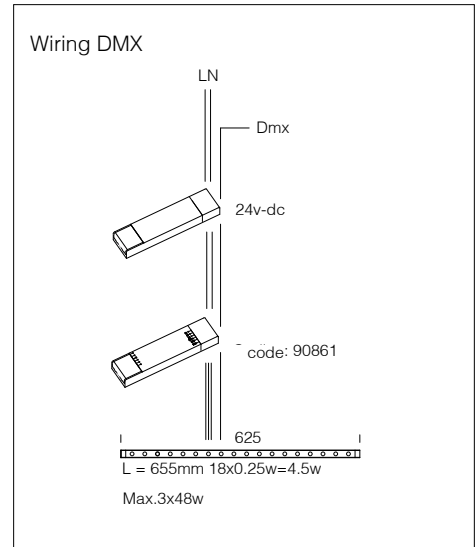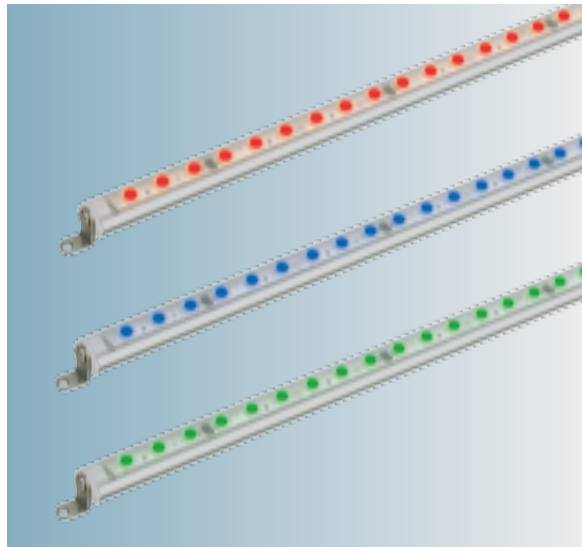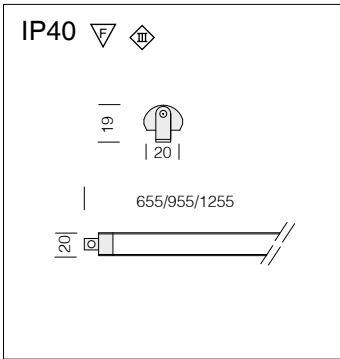

Art. Microliset cod. 22017382-00 beam.

Micro Liset adjustable RGB				
wattage/W	colour	CLD S+L		LED (Ta=25°C)
		L	code	
18x0,25W LED RGB	natural oxi.alum.	655	22017780-00	4.5
24x0,25W LED RGB	natural oxi.alum.	855	22017781-00	6.75
36x0,25W LED RGB	natural oxi.alum.	1255	22017782-00	9
36x0,25W LED RGB	natural oxi.alum.	655	22017380-00	9
54x0,25W LED RGB	natural oxi.alum.	955	22017381-00	13.5
72x0,25W LED RGB	natural oxi.alum.	1255	22017382-00	18

Complete with LED RGB of 0,25W.

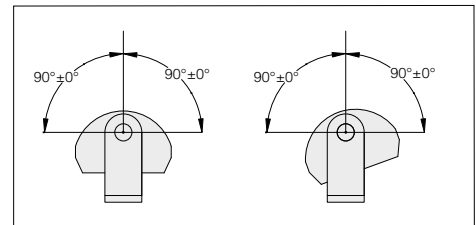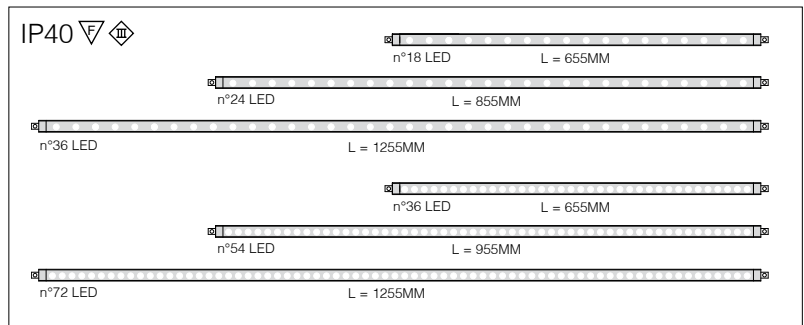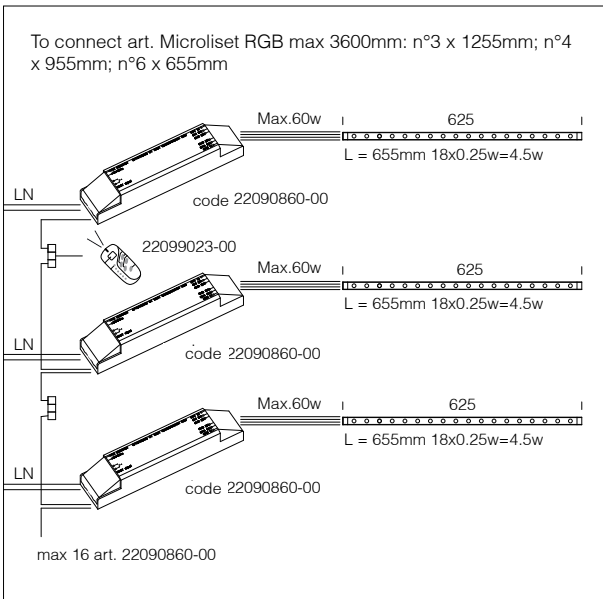


DMX controller for Microliset RGB
22090861-00
Max 48W for canal

Power supply and connector for Microliset RGB
22099023-00
22090860-00


Remote control for receiver IRE
22099023-00
Control for a distance of up to 10/15 m.

IRE for Microliset
22099050-00

The LED lights used for these products consume 15W per linear metre, with a Ra coloration over 90 (92-96). Higher power efficiency can be obtained if necessary, but the Ra goes down to 75 (does not apply to the RGB version). For information please go to www.fosnova.it

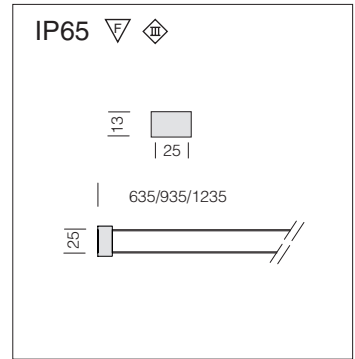



Micro Liset fixed 3200K					
		CLD S+L			LED (Ta=45°C)
wattage	colour	dimension	code	W tot	
12x0,25W LED white	natural oxi.alum.	635	22018270-00	3	Complete with LED WHITE of 0,25W. Ra 96
18x0,25W LED white	natural oxi.alum.	935	22018271-00	4,5	
24x0,25W LED white	natural oxi.alum.	1235	22018272-00	6	
18x0,25W LED white	natural oxi.alum.	635	22018370-00	4.5	
27x0,25W LED white	natural oxi.alum.	935	22018371-00	6.75	
36x0,25W LED white	natural oxi.alum.	1235	22018372-00	9	
36x0,25W LED white	natural oxi.alum.	635	22018170-00	9	
54x0,25W LED white	natural oxi.alum.	935	22018171-00	13.5	
72x0,25W LED white	natural oxi.alum.	1235	22018172-00	18	

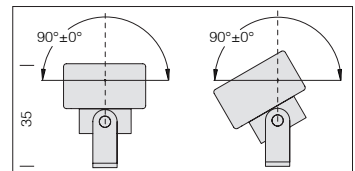

Micro Liset fixed 5500K					
		CLD S+L			LED (Ta=45°C)
wattage	colour	dimension	code	W tot	
12x0,25W LED white	natural oxi.alum.	635	22018273-00	3	Complete with LED WHITE of 0,25W. Ra 92
18x0,25W LED white	natural oxi.alum.	935	22018274-00	4,5	
24x0,25W LED white	natural oxi.alum.	1235	22018275-00	6	
18x0,25W LED white	natural oxi.alum.	635	22018373-00	4.5	
27x0,25W LED white	natural oxi.alum.	935	22018374-00	6.75	
36x0,25W LED white	natural oxi.alum.	1235	22018375-00	9	
36x0,25W LED white	natural oxi.alum.	635	22018173-00	9	
54x0,25W LED white	natural oxi.alum.	935	22018174-00	13.5	
72x0,25W LED white	natural oxi.alum.	1235	22018175-00	18	






Micro Liset fixed 4100K					
		CLD S+L			LED (Ta=45°C)
wattage	colour	dimension	code	W tot	
12x0,33W LED white	natural oxi.alum.	635	22018276-00	3	Complete with LED WHITE of 0,33W. Ra 75
18x0,33W LED white	natural oxi.alum.	935	22018277-00	4,5	
24x0,33W LED white	natural oxi.alum.	1235	22018278-00	6	
18x0,33W LED white	natural oxi.alum.	635	22018376-00	4.5	
27x0,33W LED white	natural oxi.alum.	935	22018377-00	6.75	
36x0,33W LED white	natural oxi.alum.	1235	22018378-00	9	
36x0,33W LED white	natural oxi.alum.	635	22018176-00	12	
54x0,33W LED white	natural oxi.alum.	935	22018177-00	18	
72x0,33W LED white	natural oxi.alum.	1235	22018178-00	24	

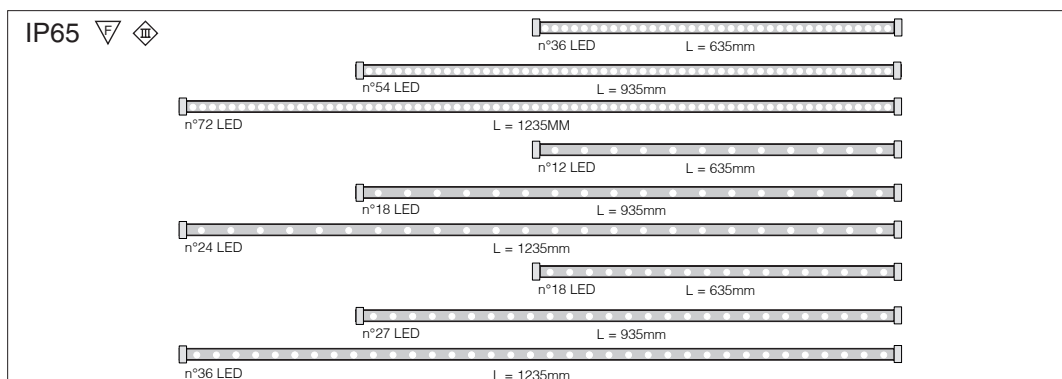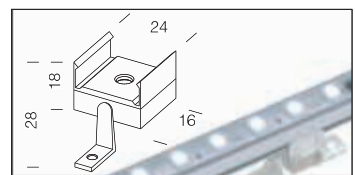

Bracket for fixed Microliset	
transp. poly.	22025972-00
To be used with Micro Liset	


Adjustable bracket for Microliset IP65	
transp. poly.	22025973-00

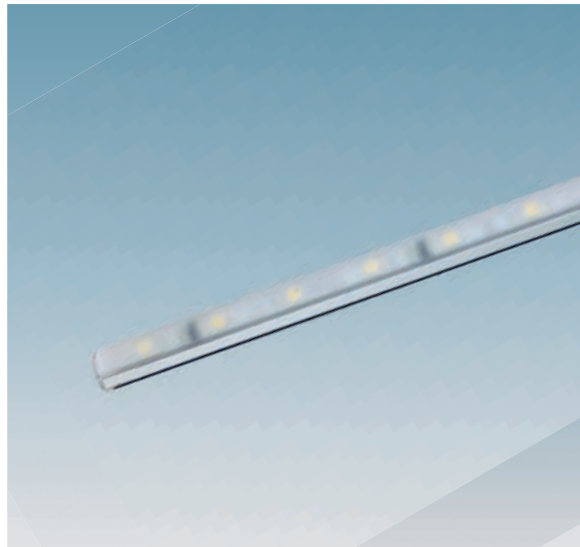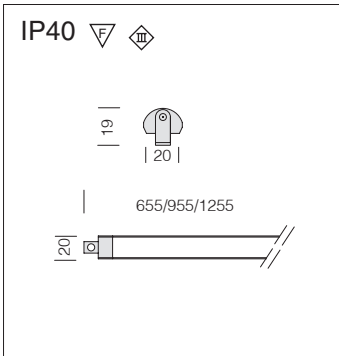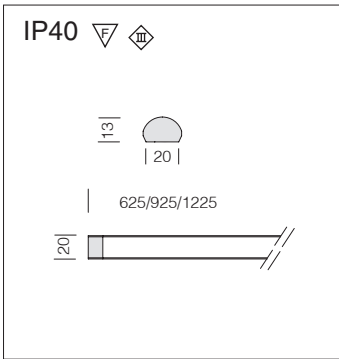

Micro Liset opal - fixed 3200K					
		CLD S+L			LED (Ta=25°C)
wattage	colour	dim.	code	W tot	24V
18x0,25W LED white	natural oxi.alum.	625	22018470-00	4.5	Complete with LED WHITE of 0,25W. Ra 96
27x0,25W LED white	natural oxi.alum.	925	22018471-00	6.75	
36x0,25W LED white	natural oxi.alum.	1225	22018472-00	9	

Micro Liset opal - adjustable 3200K					
		CLD S+L			LED (Ta=25°C)
wattage	colour	dim.	code	W tot	24V
18x0,25W LED white	natural oxi.alum.	655	22018570-00	4.5	Complete with LED WHITE of 0,25W. Ra 96
27x0,25W LED white	natural oxi.alum.	955	22018571-00	6.75	
36x0,25W LED white	natural oxi.alum.	1255	22018572-00	9	

Emergency KIT for Microliset 1 HOUR OPERATING TIME




KIT C1 24 - Emergency 1h 24v	
22096051-00	
Equipped with 24V ballast, 1 h battery and emergency light unit.	

Number of LED lights connected

MICROLISSET 24v	Flux %
(4)	100
(8)	50
(54)	35
(72)	25

Emergency KIT for Microliset 3 HOUR OPERATING TIME



KIT C3 24 - Emergency 3h 24v	
22096053-00	
Equipped with 24V ballast, 3 h battery and emergency light unit.	

Number of LED lights connected

MICROLISSET 24v	Flux %
(4)	100
(8)	50
(54)	35
(72)	25

IP20 box for Microliset	
220-240V - 24V DC 70W	22092022-00
220-240V - 24V DC 20W	22090839-00
Dimmable power supply for Microliset	
1-10V - 24V DC 20W	22090840-00
dim. DALI 20W	22090846-00
Dimmable interface for Microliset	
1-10V in 24 DC out 24 DC 120W	22090841-00

Box IP67 Box LED		
wattage	colour	code
220-240V/24V 70W	black	22092036-00
220-240V/24V 150W	black	22092038-00

