








Housing: made from steel, adjustable. Supplied with springs for recessed installation.

Coating: fluid-coated with humidity resistant UV-stabilized polyester paint, after a chromate treatment.

Equipment: with springs for false ceilings, max. 30mm.


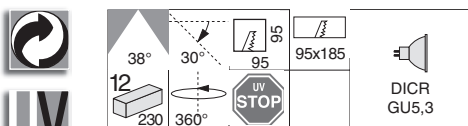


DICR GU5,3

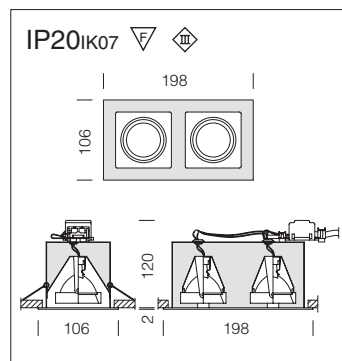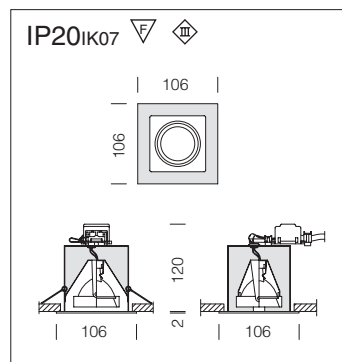
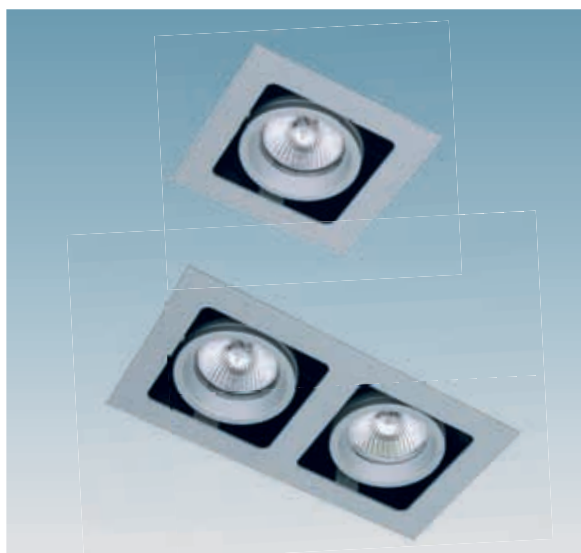
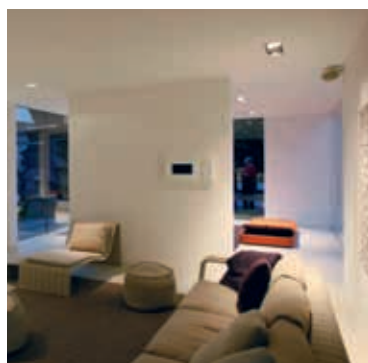


Minishop 1 - A				
		S+L		Lamps (Ta=25°C)
wattage	colour	weight	code	Kelvin - ølm - Ra
DICR 50	m. silver	0,50	22181171-00	3000K - 2000 h - 1500cd - 38°
Supplied with lamp.				

Minishop 2 - A				
		S+L		Lamps (Ta=25°C)
wattage	colour	weight	code	Kelvin - ølm - Ra
DICR 2x50	m. silver	0,80	22181173-00	3000K - 2000 h - 1500cd - 38°
Supplied with lamp. Version with LED is available on request.				

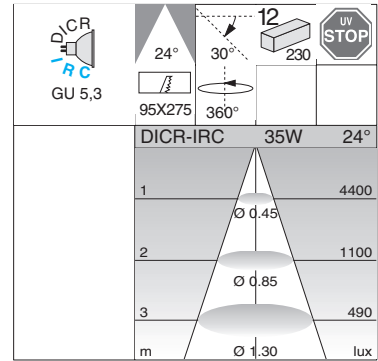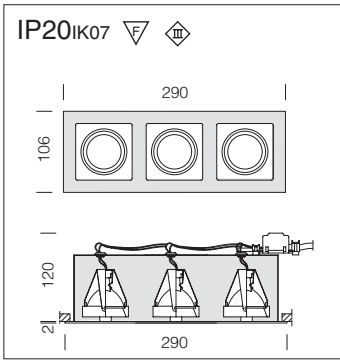

Minishop 3 - A				
		S+L		Lamps (Ta=25°C)
wattage	colour	weight	code	Kelvin - ølm - Ra
DICR-IRC 3x35	m. silver	1,20	22181175-00	3000K - 5000h - 4400cd - 24°
Supplied with lamp.				

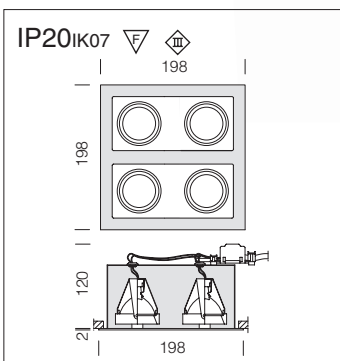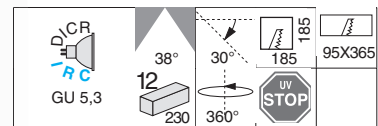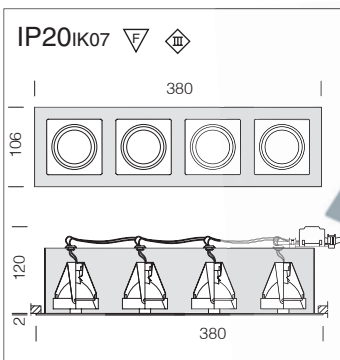

Minishop 4 - A - in line				
		S+L		Lamps (Ta=25°C)
wattage	colour	weight	code	Kelvin - ølm - Ra
DICR-IRC 4x35	m. silver	1,60	22181176-00	3000K - 5000h - 4400cd - 38°
Supplied with lamp.				

Minishop 4				
		S+L		Lamps (Ta=25°C)
wattage	colour	weight	code	Kelvin - ølm - Ra
DICR-IRC 4x35	m. silver	1,30	22181177-00	3000K - 5000h - 4400cd - 38°
Supplied with lamp.				