


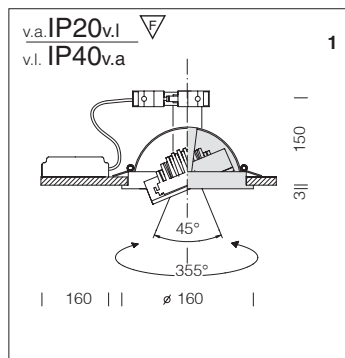


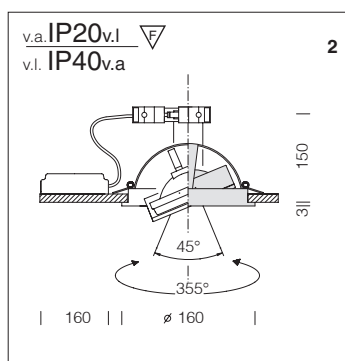


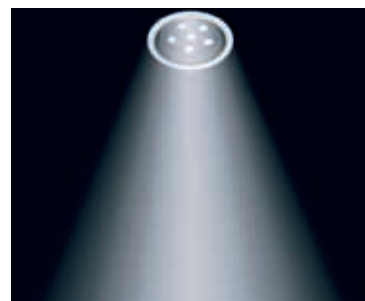


Housing: made from steel, adjustable.
Reflector: in plated aluminium, oxidized and polished. High efficiency.
LED: high efficiency Esalet type, with heat sink, longer working life, Ra 80 index.

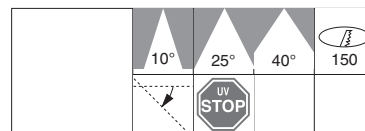

Robin 1 - ESALED fig.1					
		CLD CELL			LED (Ta=25°C)
wattage/W (700mA)	colour	weight	code	W tot	K - ølm (700mA) - degrees
ESALED	white	0,50	22181815-00	16,8	3000 - 890 - 10°
ESALED	white	0,50	22181816-00		3000 - 890 - 25°
ESALED	white	0,50	22181817-00		3000 - 890 - 40°
ESALED	white	0,50	22181810-00	16,8	4000 - 1020 - 10°
ESALED	white	0,50	22181811-00		4000 - 1020 - 25°
ESALED	white	0,50	22181812-00		4000 - 1020 - 40°

Robin 1 - AR111 fig.2				
		CTL		Lamps (Ta=25°C)
wattage/W	colour	weight	code	K - cd - beam
AR111-IRC 50	white	0,50	22181911-00	3000 - 5800cd - 24°

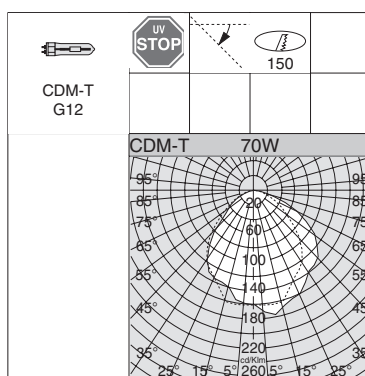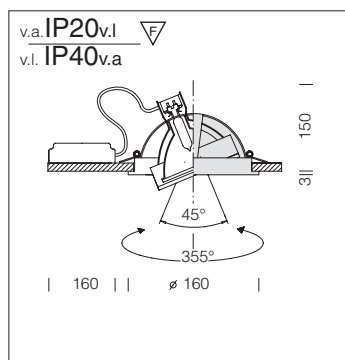

Robin 2				
		CELL		Lamps (Ta=25°C)
wattage/W	color	weight	code	Kelvin - ølm - Ra
CDM-T 20	white		22181912-00	3000K - 1650lm - Ra 8
CDM-T 35 ELITE	white	0,90	22181913-00	3000 K - 3500 lm - Ra 90
CDM-T 70 ELITE	white	0,90	22181914-00	3000 K - 7300 lm - Ra 90
CDM-T 100 ELITE	white		22181915-00	3000K - 11000 lm - Ra 90

Ceramic lamps, excellent colour rendering.