



The ever popular Safe Edge has been fully restyled and redesigned to make it ideal for use in modern prestigious applications. The new design retains popular features such as the universal legend arrangement, which pivots through a full 90 degrees making the product suitable for mounting on walls, flat ceilings and even sloping ceilings. Long life LED versions are now available where maintained applications with long illumination periods are experienced. Available in white or silver finish. The fitting provides clear direction along with good aesthetic appearance, making it suitable for use in a very wide range of applications.

- BSI kitemarked for peace of mind
- ICEL registered with verified light performance
- Suitable for wall or ceiling mounting
- Legend panel pivots for use on walls or sloping ceilings
- Long life 50,000 hour LED version
- Quick and easy to install
- Accepts surface or concealed wiring
- Available in a choice of colours
- Available in self-contained, AC/DC and AC mains slave versions
- EasiCheck, Intellem and CeaGuard self test versions

Lamp Options

- 8W T5 fluorescent, 3500°K - G5 cap 
- 3W LED strip


Materials

- Body - Flame retardant ABS
- Legend panel - clear acrylic with pre applied legends
- Batteries (self contained versions) - NiCd

Installation Notes

- Suitable for ceiling or wall mounting, legend rotates through 90°
- Rear BESA entry, break out section for surface side entry

Dimensions

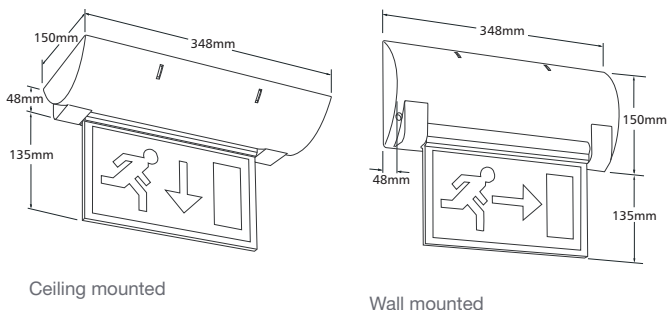


Options

- Maintained (switchable) 3 hour duration
- Choice of white or silver finish
- Intellem self check. See page 309
- EasiCheck addressable testing. See page 304
- Central system slave versions
- CeaGuard testing versions

Specification




Self contained - To specify state: Edge-lit, emergency sign suitable for either wall or ceiling mounting, finished in white/silver, legend panel to be fully compliant with EN 1838 illumination requirements as Menvier Safe Edge part number _____

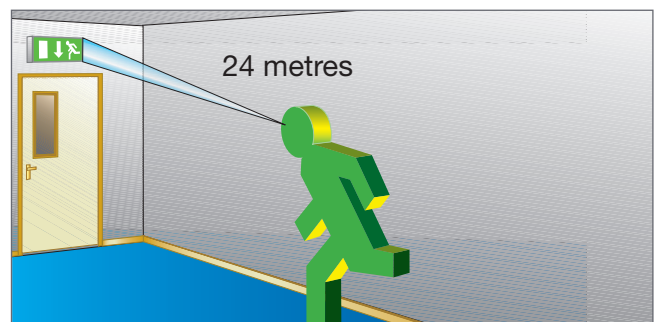Maximum Viewing Distance



Catalogue Numbers

Safe Edge Luminaire	White Finish	Silver Finish	Weight (kg)
Fluorescent			
Maintained 3Hr	NSED	NSEDS	1.8
Maintained 3Hr Self-test	NSEDIS	NSEDISS	 1.8
Maintained 3Hr EasiCheck	NSEDEC	NSEDECS	1.8
Maintained 3Hr EasiCheck 2	NSEDEC2	NSEDEC2S	1.8
230V Ceaguard Slave	NSED230CG	NSED230CGS	1.6
230V AC Mains Slave	NSED230	NSED230S	1.6
230V AC Mains Slave EasiCheck	NSED230EC	NSED230ECS	1.6
50V AC/DC Central System Slave	NSED50	-	1.6
110V AC/DC Central System Slave	NSED110	-	1.6
LED			
Maintained 3Hr	NSLED	NSLEDS	1.9
Maintained 3Hr Self-test	NSLEDIS	NSLEDISS	 1.9
Maintained 3Hr EasiCheck	NSLEDEC	NSLEDECS	1.6
Maintained 3Hr EasiCheck 2	NSLEDEC2	NSLEDEC2S	1.6
230V Ceaguard Slave	NSLED230CG	NSLED230CGS	1.6
230V AC Mains Slave	NSLED230	NSLED230S	1.6
230V AC Mains Slave EasiCheck	NSLED230EC	NSLED230ECS	1.6
Primary product for an optimised energy efficient lighting solution			

Legend Panels	Pictogram	Cat No	Weight (kg)
Single sided panel. Down arrow		LUCADS	0.35
Double sided panel. Left and right arrow		LUCALR	0.35
Double sided panel. Down arrow		LUCAD	0.35