

Housing: vandal resistant nylon, UV-stabilised.

Frame: die-cast aluminium.

Diffuser: in opal plexiglass.

Standard supply: grid with louvres.


Working life: 40000h (from -30° to +50° C - Ta=25°C).



1210 Box LED with vertical screen

		CLD CTL			LED (Ta=25°C)	
wattage (80mA)	colour	weight	code	W tot	K	ølm 80mA
1W LED white	black	1,00	431502-00	1W	4000	45lm
1W LED blue	black	1,00	431502-71	1W		9lm
1W LED red	black	1,00	431502-72	1W		12lm
1W LED yellow	black	1,00	431502-73	1W		15lm
1W LED green	black	1,00	43150274	1W		21lm

Incorporated power supply 220-240V 50/60 Hz.

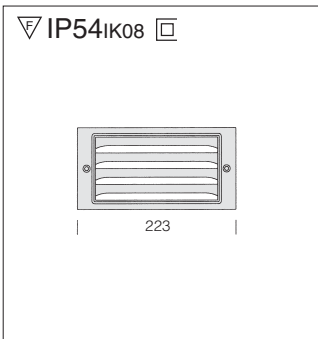

Housing: vandal resistant nylon, UV-stabilised.



Frame: die-cast aluminium.

Diffuser: in opal plexiglass.

Standard supply: grid with louvres.

Working life: 40000h (from -30° to +50° C - Ta=25°C).

Equipment: rubber gasket. With removable electric gear tray.

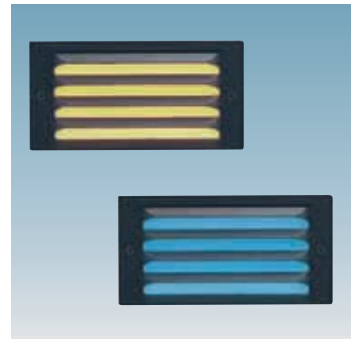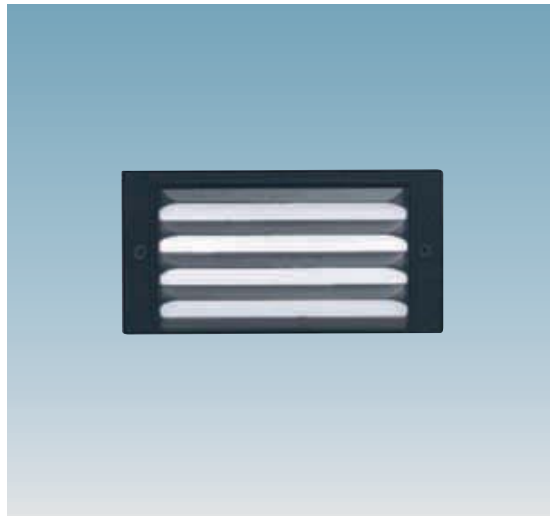

1211 Box LED with horizontal screen

		CLD CTL			LED (Ta=25°C)	
wattage (80mA)	colour	weight	code	W tot	K	ølm 80mA
1W LED white	black	1,00	431602-00	1W	4000	45lm
1W LED blue	black	1,00	431602-71	1W		9lm
1W LED red	black	1,00	431602-72	1W		12lm
1W LED yellow	black	1,00	431602-73	1W		15lm
1W LED green	black	1,00	431302-74	1W		21lm

Incorporated power supply 220-240V 50/60 Hz.