

Housing and frame: injection moulded in white polycarbonate, shatter-proof and self-extinguishing.

Diffuser: extruded in opal engineering plastic with high thermal transmittance.


Wiring: rapid wiring connection, the fixture does not need to be opened. Designed with plug-socket connection for both the power supply and the 1-10V dimmer.

Power consumption: 36W (LED + driver).

Equipment: LED LG. Risk classification and Photobiological safety: free group. No maintenance.

Energy savings: save over 30% energy compared to T5 lamps.


840 LED Panel - DIMM						
		CLD CELL-D			LED (Ta=25°C)	
wattage/W (520mA)	colour	weight	code	prezzo €	W tot	K - ølm (520mA) - Ra
LED white	white	2,90	150200-00	244,00	36W	4000K - 3700lm - Ra>80




acc. 320 safety cord
998004-00
Steel safety cord.



new

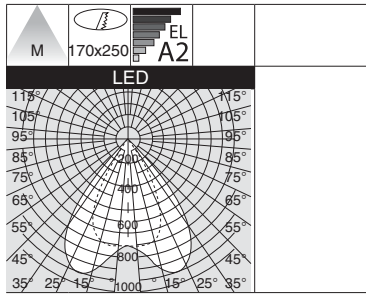



Trial LED - Sistema COB				
		CLD CELL		LED (Ta=25°C)
wattage (1500mA)	colour	weight	code	W tot
LED white	white	3.40	22065412-00	114W
LED white	white	3.40	22065411-00	135W

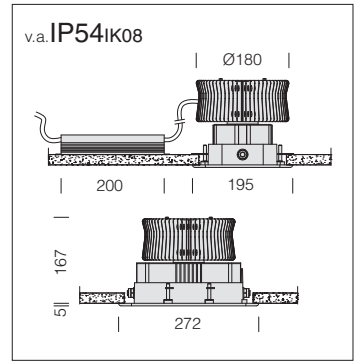

Housing: in extruded 6060 aluminium alloy with 1.5 mm thick steel end caps. Frame in die-cast aluminium for recessed mounting on false ceilings with integrated brackets. Screws and washers in AISI 304 stainless steel.

Shield: clear glass, 5 mm thick, resistant to thermal and mechanical stress (UNI-EN-12150-1:2001).

Reflector: in 99.99 pure aluminium, bright-diffuse, 0.5 mm thick, with total reflectance >=93.

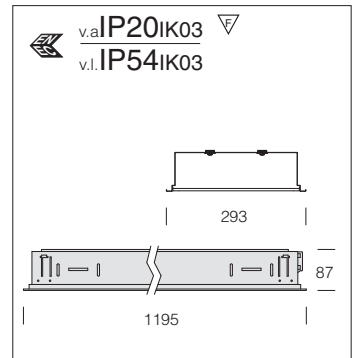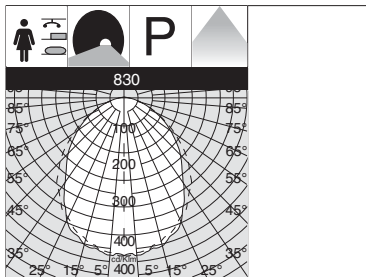


Housing: made of sheet steel.

Diffuser: in frosted plexiglass.

Supplied without brackets: for contact mounting directly on the cross T structure. When not contact mounted.


830 - Comfort - recessed - Power LED				
		CLD CTL		LED
wattage 116mA	colour	weight	code	W tot
LED white	white	5.30	152121-00	52W

On request: emergency version.





acc. 901 adjustable bracket	
galvanized	998026-00


In zinc plated steel. 4-pc set to be used when the fixture is not contact mounted.

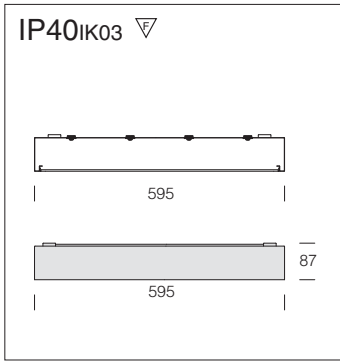

Housing: made of sheet steel.
Diffuser: in frosted plexiglass.

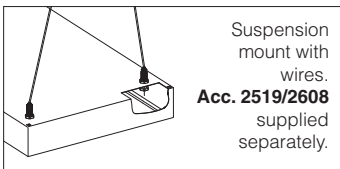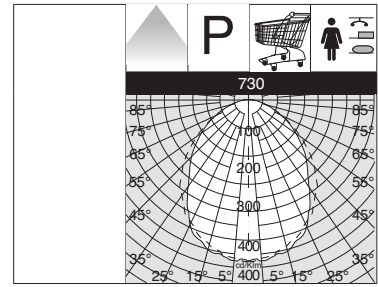


730 - Comfort - ceiling fixture - Power LED					
		CLD CTL		LED (Ta=25°C)	
wattage 116mA	colour	weight	code	W tot	K - ølm 116mA
LED white	white	6.80	142122-00	52W	4000K - 5470lm
On request: emergency version.					



acc. 2519 powered suspension

m. silver	993909-00
-----------	-----------


Suspension supplied with steel wire, 1.75 m long with millimetric adjustment and power cable. Max load 20 kg.
5 poles.





acc. 2608 electrified suspension

white	994617-00
-------	-----------

Nylon cover and steel brackets. With steel wire Ø1,5mm; L=1,5m - 30Kg, and millimetric adjustment.

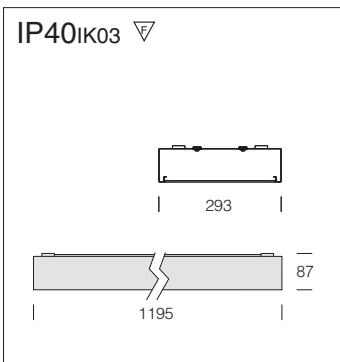

Housing: made of sheet steel.
Diffuser: in frosted plexiglass.

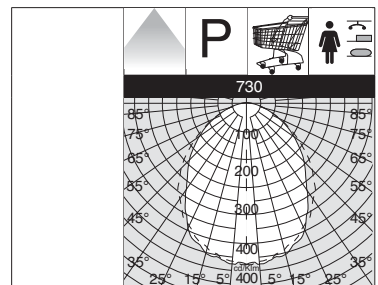

730 - Comfort - ceiling fixture - Power LED					
		CLD CTL		LED (Ta=25°C)	
wattage 116mA	colour	weight	code	W tot	K - 116mA
LED white	white	7.90	142121-00	52W	4000K - 5470lm
On request: emergency version.					