


Housing/Frame: in die-cast aluminium.
Diffuser: impact and thermal shock resistant tempered glass.
LED: Upon request, 8° or 40° beam aperture.
Adjustable LED plate.




1620 Floor - Power LED												
wattage	colour	CLD CTL		Beam angle	W tot	temperature and load				LED (Ta=25°C)		
		weight	code			max T. on glass		max load kg	Can be walked on	bears vehicle loads	K	ølm 350mA
				ta 25°	ta 15°							
3,5W LED white	graphite	6,00	530503-00	20°	17,5W	50°	40°	4000	OK	OK	4000	1310lm
3,5W LED blue	graphite	6,00	530503-71	20°	17,5W	50°	40°	4000	OK	OK		352,5lm
3,3W LED red	graphite	6,00	530503-72	20°	17,5W	50°	40°	4000	OK	OK		459lm
3,3W LED yellow	graphite	6,00	530503-73	20°	17,5W	50°	40°	4000	OK	OK		459lm
3,5W LED green	graphite	6,00	530503-74	20°	17,5W	50°	40°	4000	OK	OK		1010lm

220-240V 50/60 Hz and two built-in ballasts.

Installation example

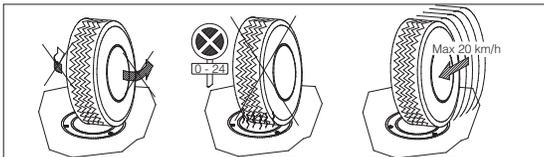

The luminaire can be walked on and can bear vehicle loads.

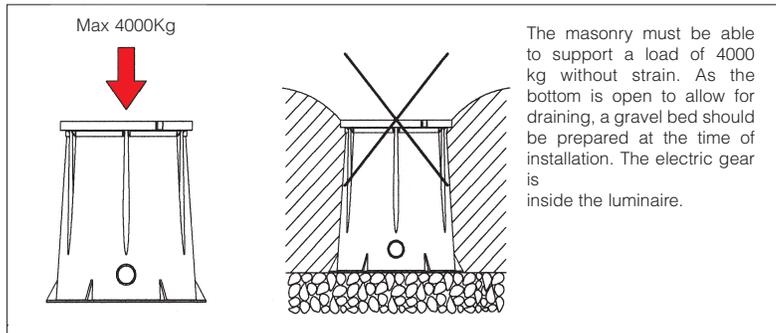

The masonry must be able to support a load of 4000 kg without strain. As the bottom is open to allow for draining, a gravel bed should be prepared at the time of installation. The electric gear is inside the luminaire.

Example **beam angle 8°** art. 530503-00 with Power LED.



Example **beam angle 20°** art. 530503-00 with Power LED.



Example **beam angle 40°** art. 530503-00 with Power LED.

