


Housing: in fibreglass aluminium and stainless steel AISI 316 frame.

Diffuser: in tempered glass, resistant to thermal shock and impacts.

Life: 50000h (from -30° to +50° C - Ta=25°C).

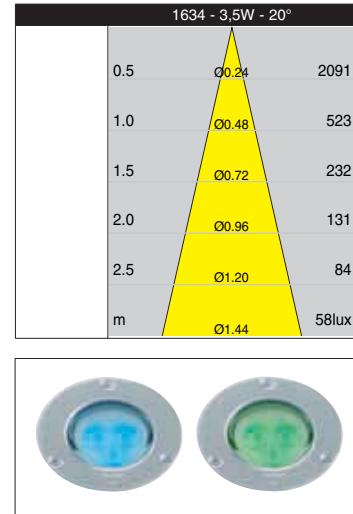

1634 Microfloor - Power LED

wattage (350mA)	colour	CLD S+L		Beam angle	W tot	temperature and load					LED (Ta=25°C)	
		weight	code			Max T. on glass ta 25°	Max T. on glass ta 15°	max kg load	can be walked on	can bear vehicle loads	K	Ølm 350mA
3,5W LED white	stainless steel	0.40	530815-00	20°	3,5W	40°C	30°	2000	OK	OK	4000	262lm
3,5W LED blue	stainless steel	0.40	530815-71	20°	3,5W	40°C	30°	2000	OK	OK		70.5lm
3,3W LED red	stainless steel	0.40	530815-72	20°	3,3W	40°C	30°	2000	OK	OK		91.8lm
3,3W LED yellow	stainless steel	0.40	530815-73	20°	3,3W	40°C	30°	2000	OK	OK		91.8lm
3,5W LED green	stainless steel	0.40	530815-74	20°	3,5W	40°C	30°	2000	OK	OK		202lm

Electric gear

COD. 997665-00


Airtight box containing the ballast.

WIRE SECTION


1,5mm² P=10W max 50m

MIN 1W - MAX 17W

(max 4 spotlights)



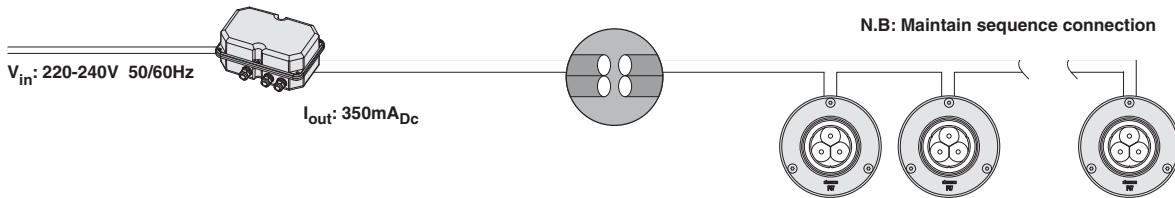


acc. 179 IP677CT



CODE	VOLTAGE in	CURRENT V _{DC} out	min. no. spotlights	max no. spotlights	Watt
997665-00	220-240V 50/60Hz	350mA	1	4	17

Waterproof box containing the ballast.



acc. 313 - outer shell
993925-00
To install Microfloor into the ground.