






Housing: vandal resistant fibreglass nylon.

Frame: die-cast aluminium.

Diffuser: tempered resistant to thermal shock and impact glass.

Working life: 50000h (from -30° to +50° C - Ta=25°C).

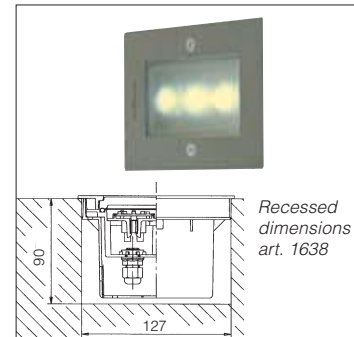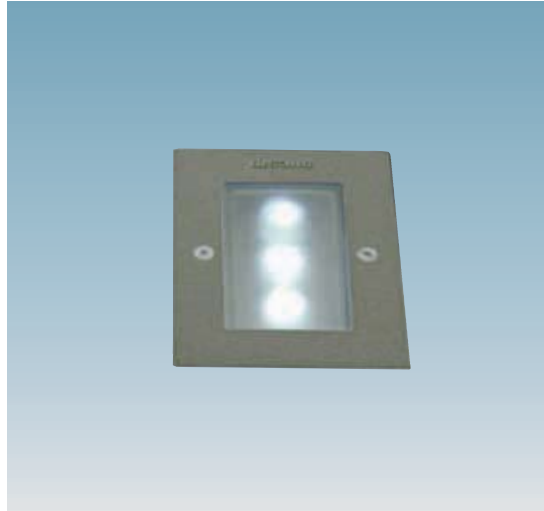

1623 Starled - Power LED rectangular

		CLD S+L			temperature and load				LED (Ta=25°C)		
wattage (350mA)	colour	weight	code	Beam angle	W tot	Max T. on glass		can be walked on	can bear vehicle loads	K	ølm 350mA
						ta 25°	ta 15°				
1,15W LED white	graphite	0.25	530694-00	25°	3,5W	40°C	30°	OK	OK	4000	262,2lm
1,15W LED white	s. silver	0.25	530695-00	25°	3,5W	40°C	30°	OK	OK	4000	262,2lm
1,15W LED blue	graphite	0.25	530694-71	25°	3,5W	40°C	30°	OK	OK		70,5lm
1,1W LED red	graphite	0.25	530694-72	25°	3,5W	40°C	30°	OK	OK		91,8lm
1,1W LED yellow	graphite	0.25	530694-73	25°	3,5W	40°C	30°	OK	OK		91,8lm
1,15W LED green	graphite	0.25	530694-74	25°	3,5W	40°C	30°	OK	OK		201,6lm
1,15W LED blue	s. silver	0.25	530695-71	25°	3,5W	40°C	30°	OK	OK		70,5lm
1,1W LED red	s. silver	0.25	530695-72	25°	3,5W	40°C	30°	OK	OK		91,8lm
1,1W LED yellow	s. silver	0.25	530695-73	25°	3,5W	40°C	30°	OK	OK		91,8lm
1,15W LED green	s. silver	0.25	530695-74	25°	3,5W	40°C	30°	OK	OK		201,6lm



Electric gear

CODE 997665-00
Ballast in IP65 box


WIRE SECTION
P = 17W - 1,5mm² - distanza max 50m

MIN 1W - MAX 17W
(max 4 spotlights)


V_{in}: 220/240V
50-60Hz



N.B: maintain sequence connection





acc. 179 IP677CT



CODE	VOLTAGE in	CURRENT V _{DC} out	min. no. spotlights	max no. spotlights	Watt
997665-00	220-240V 50/60Hz	350mA	1	4	17

Installation example

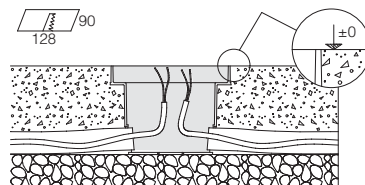

It is advised to install Starled according to the following information.

