






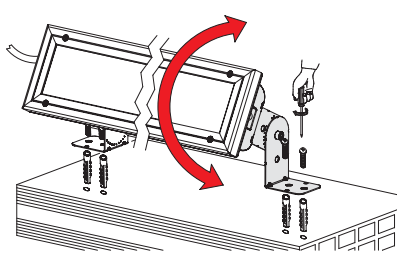


Installation example




Wall or floor Installation example with acc. 310

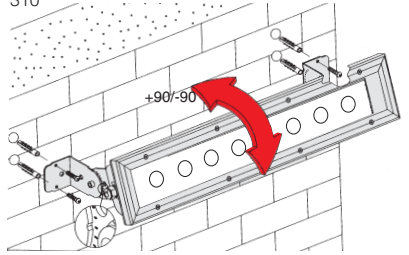


Wall installation with acc. 311

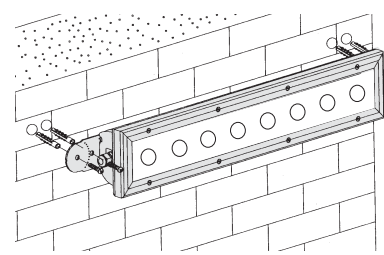

acc. 310 adjustable connection	
inox	993923-00
To install Sicura to wall/floor. With possibility of adjustment and inclination. 2 per pack.	



acc. 311 fixe connection	
inox	993922-00
To install Sicura permanently on walls/floors. 2 per pack.	

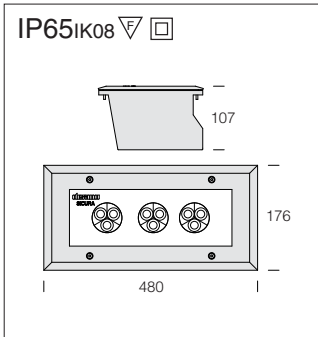

Housing: complete with graphite aluminium frame with die-cast aluminium end caps.


Diffuser: impact and thermal shock resistant tempered 4mm thick glass.

Working life: 50000h (from -30° to +50° C - Ta=25°C).



1835 Minisicura - Power LED							
		CLD CTL			LED (Ta=25°C)		
wattage (350mA)	colour	weight	code	Beam angle	W tot	K	ølm 350mA
3,5W LED white	graphite	6,80	414240-00	60°	10,5W	4000	786lm
3,5W LED blue	graphite	6,80	414240-71	60°	10,5W		212lm
3,3W LED red	graphite	6,80	414240-72	60°	10,5W		275lm
3,3W LED yellow	graphite	6,80	414240-73	60°	10,5W		275lm
3,5W LED green	graphite	6,80	414240-74	60°	10,5W		606lm

On request: beam opening 6° and 45°.
Incorporated power supply 220-240V 50/60 Hz.

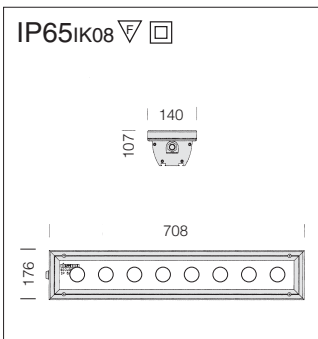

1724 Sicura - Power LED							
		CLD CTL			LED (Ta=25°C)		
wattage (350mA)	colour	weight	code	Beam angle	W tot	K	ølm 350mA
3,5W LED white	graphite	8,40	414228-00	20°	28W	4000	2096lm
3,5W LED blue	graphite	8,40	414228-71	20°	28W		564lm
3,3W LED red	graphite	8,40	414228-72	20°	28W		734lm
3,3W LED yellow	graphite	8,40	414228-73	20°	28W		734lm
3,5W LED green	graphite	8,40	414228-74	20°	28W		1616lm

On request: beam opening 6° and 45°.
Incorporated power supply 220-240V 50/60 Hz..