



**Housing:** complete with graphite aluminium frame with die-cast aluminium end caps.

**Diffuser:** 4 mm frosted and tempered glass, resistant to thermal shock.

**Coating:** with graphite grey polyester powder, resistant to corrosive and saline environments.

**Equipment:** snap-lock optic unit secured with safety screws. Fibreglass nylon cable gland  $\varnothing$  1/2 gas thread.




ACCESSORIES


**acc. 310 adjustable connection**

stainless steel 993923-00

To install Sicura on walls/floors. It can be adjusted and tilted. **2 per pack.**

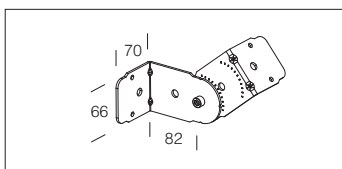


Floor or wall mounting with acc. 310

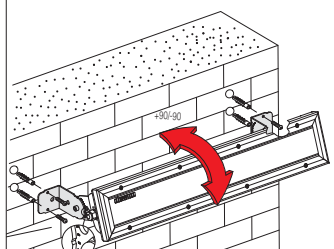


**acc. 311 bracket**


stainless steel 993922-00

To install Sicura permanently on walls/floors. **2 per pack.**

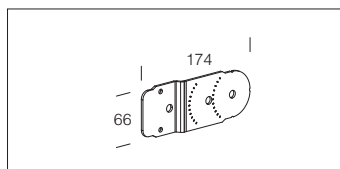


Wall mounting with acc. 311

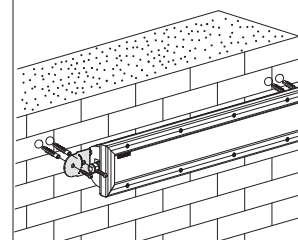

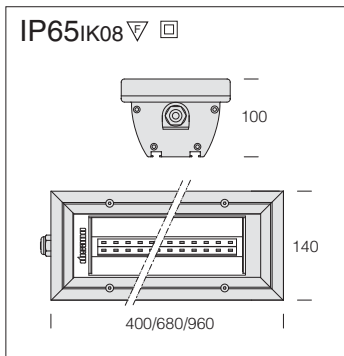


**Reflector:** symmetrical in high-gloss anodised aluminium.

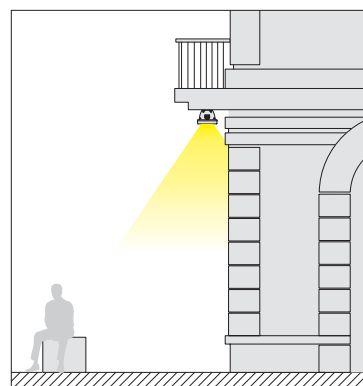


**1768 Sicura LED - wide beam**

		CLD CTL			LED (Ta=25°C)	
wattage	colour	weight	L	code	W tot	Kelvin - ølm - Ra
LED white	graphite	3.00	400	414245-00	12,5W	4000K - 1400lm - Ra 80
LED white	graphite	3.50	680	414246-00	25W	4000K - 2800lm - Ra 80
LED white	graphite	4.00	960	414247-00	37,5W	4000K - 4200lm - Ra 80

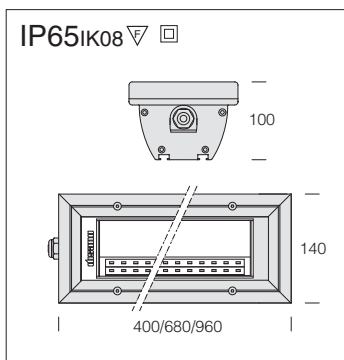

**Reflector:** symmetrical in high-gloss anodised aluminium.

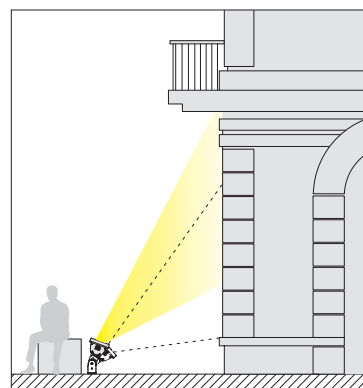

**1769 Sicura LED - asymmetric**

		CLD CTL			LED (Ta=25°C)	
wattage	colour	weight	L	code	W tot	Kelvin - ølm - Ra
LED white	graphite	3.00	400	414265-00	12,5W	4000K - 1400lm - Ra 80
LED white	graphite	3.50	680	414266-00	25W	4000K - 2800lm - Ra 80
LED white	graphite	4.00	960	414267-00	37,5W	4000K - 4200lm - Ra 80