



Housing: vandal resistant fibreglass nylon.
Frame: die-cast aluminium
Diffuser: impact and thermal shock resistant tempered glass.

1622 Starled - round - wall and floor version

wattage	colour	CLD S+L		W tot	temperature and load				LED (Ta=25°C)		
		weight	code		Max T. on glass ta 25°	Max T. on glass ta 15°	max kg load	can be walked on	can bear vehicle loads	K	ølm 24V
1W LED white	s. silver	0.25	530690-00	1W	40°C	30°	2000	OK	OK	6000	27.9lm
1W LED white	graphite	0.25	530691-00	1W	40°C	30°	2000	OK	OK	6000	27.9lm
1W LED blue	s. silver	0.25	530690-71	1W	40°C	30°	2000	OK	OK		5.4lm
1W LED red	s. silver	0.25	530690-72	1W	40°C	30°	2000	OK	OK		8.1lm
1W LED yellow	s. silver	0.25	530690-73	1W	40°C	30°	2000	OK	OK		10.8lm
1W LED green	s. silver	0.25	530690-74	1W	40°C	30°	2000	OK	OK		12.6lm
1W LED blue	graphite	0.25	530691-71	1W	40°C	30°	2000	OK	OK		5.4lm
1W LED red	graphite	0.25	530691-72	1W	40°C	30°	2000	OK	OK		8.1lm
1W LED yellow	graphite	0.25	530691-73	1W	40°C	30°	2000	OK	OK		10.8lm
1W LED green	graphite	0.25	530691-74	1W	40°C	30°	2000	OK	OK		12.6lm

On request: 4000K.

Electric gear

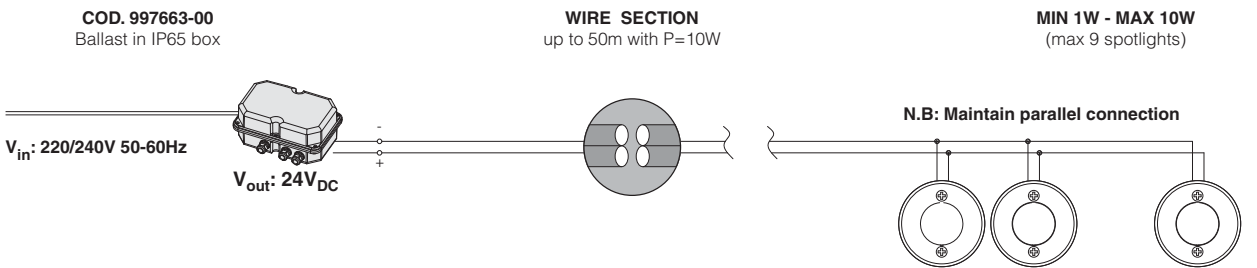

CODE	VOLTAGE in	CURRENT V _{DC} out	min. no. spotlights	max no. spotlights	Watt
997663-00	220-240V 50/60Hz	24V	1	9	10

Transformer, code 997660, should be purchased if the luminaire is used without a watertight box.

Installation example

Recessed dimension art. 1622

It is advised to install Starled according to the instructions:

