

Housing: Vandal resistant fibre-glass nylon.

Frame: in die-cast aluminium.



Diffuser: tempered glass, resistant to thermal shock and impact.

Working life: 50000h (from -30° to +50° C - Ta=25°C).

1637 Starled - wall eyelid sreen version


wattage	colour	CLD S+L			LED (Ta=25°C)	
		weight	code	W tot	K	ølm 350mA
1,15W LED white	s. silver	0.25	530770-00	1,15W	4000	87.4lm
1,15W LED white	graphite	0.25	530771-00	1,15W	4000	87.4lm
1,15W LED blue	s. silver	0.25	530770-71	1,15W		23.5lm
1,1W LED red	s. silver	0.25	530770-72	1,1W		30.6lm
1,1W LED yellow	s. silver	0.25	530770-73	1,1W		30.6lm
1,15W LED green	s. silver	0.25	530770-74	1,15W		67.2lm
1,15W LED blue	graphite	0.25	530771-71	1,15W		23.5lm
1,1W LED red	graphite	0.25	530771-72	1,1W		30.6lm
1,1W LED yellow	graphite	0.25	530771-73	1,1W		30.6lm
1,15W LED green	graphite	0.25	530771-74	1,15W		67.2lm

Electric gear

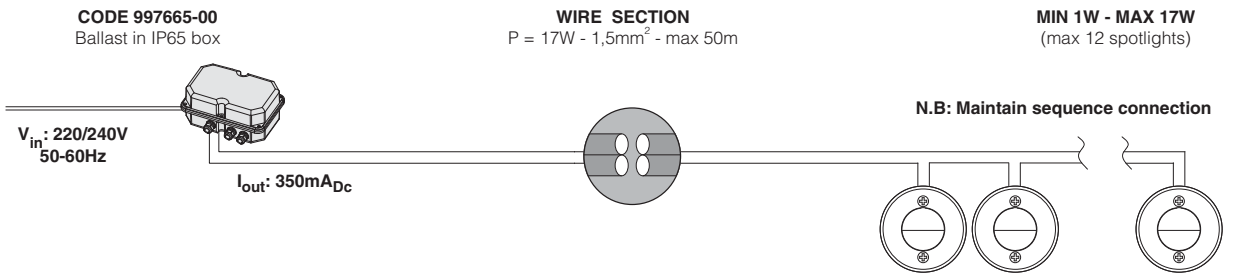

CODE	VOLTAGE in	CURRENT V _{DC} out	min. no. spotlights	max no. spotlights	Watt
997665-00	220-240V 50/60Hz	350mA	1	12	17

Installation example

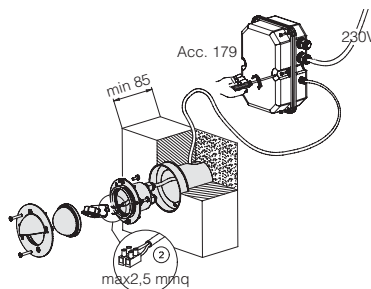

It is advised to install Starled according to the following information.