


Housing: Vandal resistant fibre-glass nylon.
Frame: in die-cast aluminium.
Diffuser: tempered glass, resistant to thermal shock and impact.
Working life: 50000h (from -30° to +50° C - Ta=25°C).

1638 Starled - wall/floor cross cross eyelid version

wattage	colour	CLD S+L		W tot	temperature and load				LED (Ta=25°C)		
		weight	code		Max T. on glass		max kg load	can be walked on	can bear vehicle loads	K	ølm 350mA
					ta 25°	ta 15°					
1,15W LED white	s. silver	0.25	530870-00	1,15W	40°C	30°	2000	OK	OK	4000	87.4lm
1,15W LED white	graphite	0.25	530871-00	1,15W	40°C	30°	2000	OK	OK	4000	87.4lm
1,15W LED blue	s. silver	0.25	530870-71	1,15W	40°C	30°	2000	OK	OK		23.5lm
1,1W LED red	s. silver	0.25	530870-72	1,1W	40°C	30°	2000	OK	OK		30.6lm
1,1W LED yellow	s. silver	0.25	530870-73	1,1W	40°C	30°	2000	OK	OK		30.6lm
1,15W LED green	s. silver	0.25	530870-74	1,15W	40°C	30°	2000	OK	OK		67.2lm
1,15W LED blue	graphite	0.25	530871-71	1,15W	40°C	30°	2000	OK	OK		23.5lm
1,1W LED red	graphite	0.25	530871-72	1,1W	40°C	30°	2000	OK	OK		30.6lm
1,1W LED yellow	graphite	0.25	530871-73	1,1W	40°C	30°	2000	OK	OK		30.6lm
1,15W LED green	graphite	0.25	530871-74	1,15W	40°C	30°	2000	OK	OK		67.2lm

Electric gear

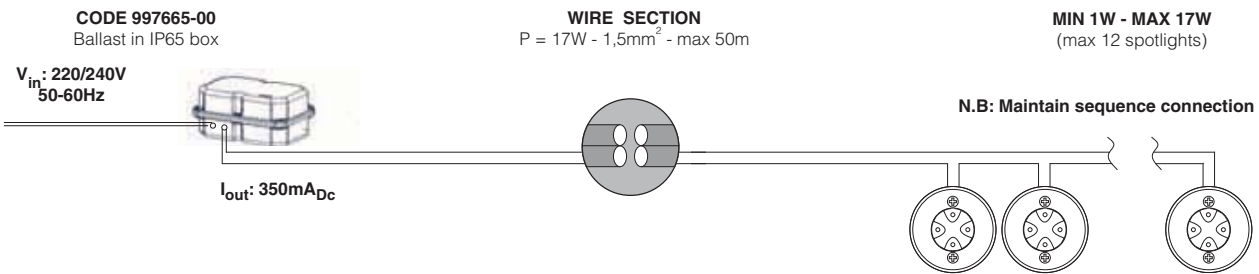

acc. 179 IP677CT	CODE	VOLTAGE in	CURRENT V _{DC} out	min. no. spotlights	max. no. spotlights	Watt
	997665-00	220-240V 50/60Hz	350mA	1	12	17

Installation example

It is advised to install Starled according to the following information.

