


Housing/Frame: in die-cast aluminium.

Diffuser: in tempered glass, 8 mm thick, thermal shock and impact resistant.



1267 Rhea - Power LED				
		CLD CTL		LED (Ta=25°C)
wattage	colour	weigh	code	W tot
LED white	white	4.00	423098-00	17W
				K - ølm 530mA
				4000K - 2000lm



acc. 89 pole attachment Ø 60


graphite	991214-00
----------	-----------

Die-cast aluminium painted by cationic electrocoating. Adapter for attachment on Ø 60 pole.

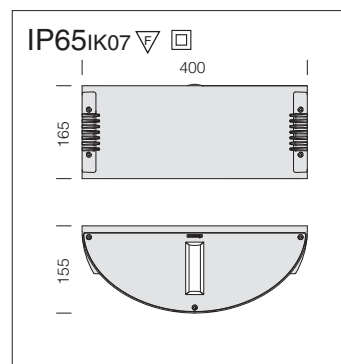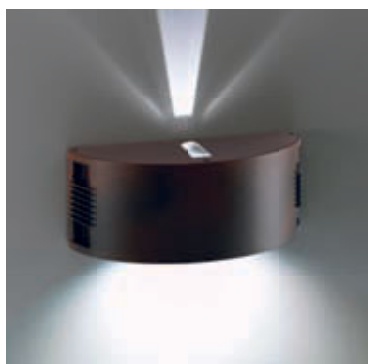


Housing/Frame: in die-cast aluminium.

Diffuser: in tempered glass, 8 mm thick, thermal shock and impact resistant.

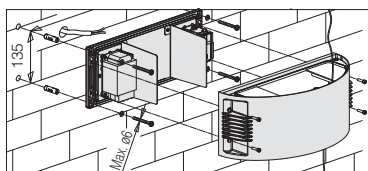

1279 Onda - Power LED - direct/indirect light				
		CLD CTL		LED (Ta=25°C)
wattage (350mA)	colour	weight	code	W tot
2,2W ind. + 13,2W dir.	white	3.60	420322-00	15,4W
2,2W ind. + 13,2W dir.	s. silver	3.60	420324-00	
2,2W ind. + 13,2W dir.	graphite	3.60	420325-00	
2,2W ind. + 13,2W dir.	corten	3.60	420322-2191	
				K - ølm - Ra
				4000K - 240lm + 1440lm


Incorporated power supply 220-240V 50/60 Hz.

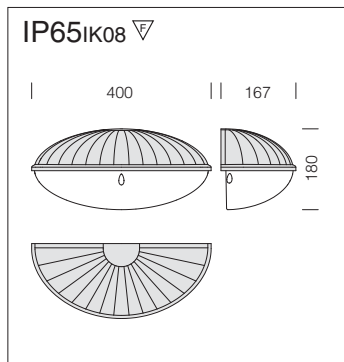


Housing: in UV-stabilised engineering plastic.

Reflector: in pre-anodised aluminium.

Diffuser: in polycarbonate opal, shatterproof and self-extinguishing, UV-stabilised

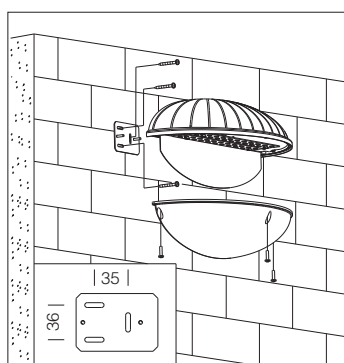


1265 Orione LED					
		CLD CTL		LED (Ta=25°C)	
wattage (350mA)	colour	weight	code	W tot	K ølm - 350mA
LED white	grey	2.10	420670-00	25W	4000K - 2500lm
LED white	s. silver	2.10	420671-00	25W	4000K - 2500lm
LED white	grey	2.10	420672-00	20W	4000K - 2050lm
LED white	s. silver	2.10	420673-00	20W	4000K - 2050lm

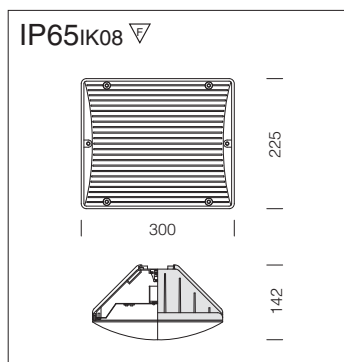

Housing: in nylon UV-stabilised.


Reflector: hammered aluminium.

Diffuser: anti-glare, vandal resistant, V2 self-extinguishing, UV-stabilised matt polycarbonate.

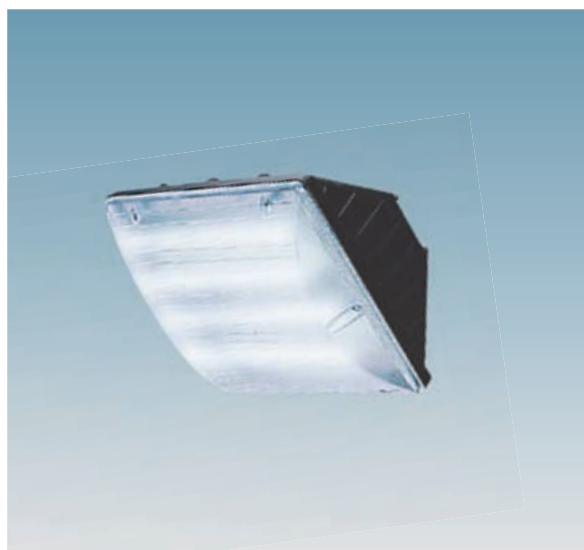

1264 Vega LED						
		CLD CTL		CLD CTL-E	LED (Ta=25°C)	
wattage (350mA)	colour	weight	code	code	W tot	K ølm - 350mA
LED white	black.	2.10	420665-00	420665-07	25W	4000K - 2500lm
LED white	s. silver	2.10	420666-00	420666-07	25W	4000K - 2500lm

acc. 1266 joint	
black	420915-00
s. silver	420916-00
1-lamp adjustable support in nylon. For Ø 60 poles.	



Self adhesive pictograms available:

995111	995112	995113	995114
995115	995116	995117	995118