





**Housing/Frame:** in die-cast aluminium.

**Diffuser:** tempered glass, 5 mm thick, thermal shock and impact resistant (UNI EN 12150 tests 1/2001).

**Coating:** in different stages. By epoxy cationic electrocoating, resistant to corrosion and saline environments. Second coating using graphite grey acrylic resin, green, UV stabilized.


**Standard supply:** complete with socket-plug. Automatic temperature control device. In the event of an unexpected temperature rise caused by particular weather conditions, the system will reduce the luminous flux to lower the working temperature and guarantee proper operation. Supplied with a safety diode to protect against voltage peaks.









## VISCONTI ACCESSORIES

**acc. 280 fork**


graphite	991430-00
In die-cast aluminium. To be used for mast-top connection. We recommend using poles acc. 1485/1487	

**acc. 281 single pole mounting arm**


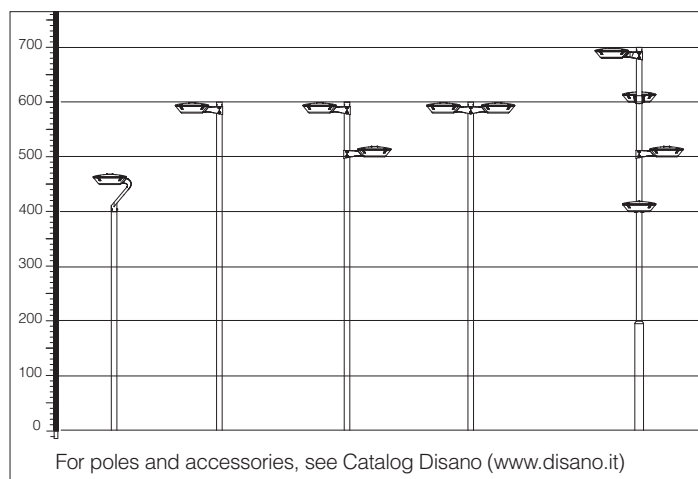
graphite	991432-00
In die-cast aluminium. We recommend using poles acc. 1485/87 – 1417/18	

**acc. 283 wall mounting arm**



graphite	991436-00
In die-cast aluminium. For wall-mounting applications.	

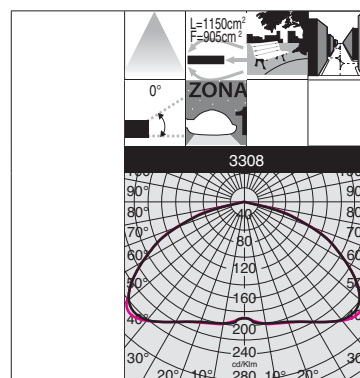

**acc. 282 dual pole mounting arm**

graphite	991434-00
In die-cast aluminium. We recommend using poles acc. 1485/87 – 1417/18	


**acc. 528 mast-top connection**

graphite	991463-00
In galvanised steel. To be used as a mast-top connection	

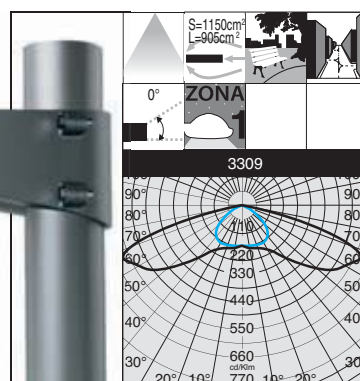



IP66IK09 EL  
A2


Art. 3308 - LED Disposition

**3308 Visconti 9 - wide beam**

		CLD CTL			LED (Ta=25°C)	
wattage	530mA	weight	code	Beam angle	W tot	K - ølm 530mA
1,6W	LED white	10.60	328090-00	130° x 70°	67W	4000K - 7728lm

IP66IK09 


Art. 3309 - LED Disposition

**3309 Visconti 10 - cycleways**


		CLD CTL			LED (Ta=25°C)	
wattage	530mA	weight	code	Beam angle	W tot	K - ølm 530mA
1,6W	LED white	10.60	328170-00	130° x 70°	67W	4000K - 7728lm




## VISCONTI ACCESSORIES

**acc. 1473 curved arm**


graphite 427013-00  
In tropicalized steel. Apply to acc. 1464/1465.

**acc. 385 1-lamp connector**


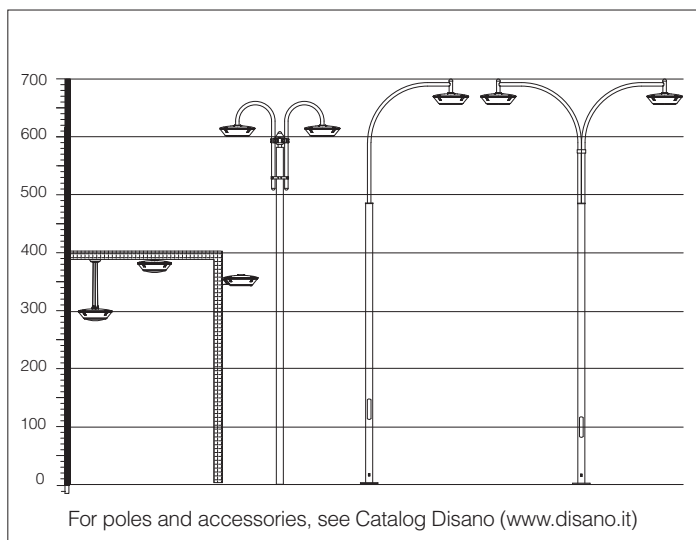
graphite 326505-00  
To be inserted in the head-pole position to create a one-lamp composition. To be used with an arm acc. 511. To be used with pole ø120.

**acc. 1464 Corona**


graphite 427000-00  
Made of die-cast aluminium. For up to 6 arms acc. 1473. Equipped with terminal block.

**acc. 384 2-lamp connector**


graphite 326507-00  
To be inserted in the head-pole position to create a 1-lamp composition. To be used with arm acc. 511. Supplied with a seal ring. To be used with pole ø120.

**acc. 383 3-lamp connector**

graphite 326508-00  
To be inserted in the head-pole position to create a three-lamp composition. To be used with three arms acc. 511. Supplied with a seal ring. To be used with pole ø193.


**acc. 511 pole arm**

graphite 991268-00  
In steel. For mast-top mounting to 1340/41/42/43 pole. To be used with acc. 383.

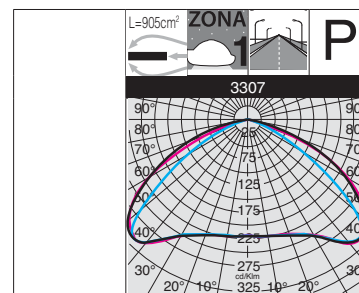

**acc. 1465 Corona flange**

graphite 427001-00  
Made of die-cast aluminium. Complete with 6 arm-stop devices to reinforce the assembly.

IP66IK09

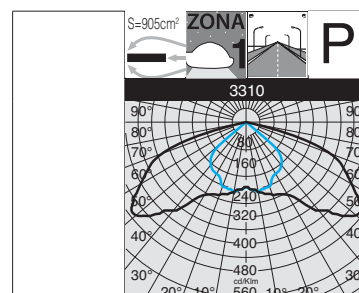



Art. 3307 - LED Disposition

**3307 Visconti 8 - suspension**

		CLD CTL		LED (Ta=25°C)	
wattage 530mA	colour	weight	code	Beam angle	W tot
1,6W LED white	graphite	10.60	328080-00	130° x 70°	67W
		4000K - 7728lm			


IP66IK09

**3310 Visconti 11 - suspension**

		CLD CTL		LED (Ta=25°C)	
wattage 530mA	colour	weight	code	W tot	K - ølm 530mA
1,6W LED white	graphite	10.60	328180-00	77W	4000K - 8832lm
1,6W LED white	graphite	10.60	328181-00	96W	4000K - 11040lm

**acc. 14 tiges**

h 500	991447-00
h 1000	991448-00
h 1500	991449-00

**acc. 55 suspension connection**

0.90	998098-00
In stainless steel AISI 304. For installation on ropes and steel cables.	

