


Housing/Frame: in die-cast aluminium.

Diffuser: in vandal-resistant V2 self-extinguishing polycarbonate, UV-stabilized, smooth and clear.

Standard supply: complete with socket-plug. Automatic temperature control device. In the event of an unexpected temperature rise caused by particular weather conditions, the system will reduce the luminous flux to lower the working temperature and guarantee proper operation.

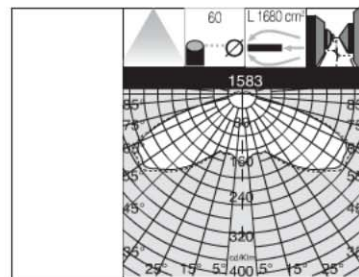

1583 Vista - Power LED - COB System					
		CLD CTL		LED (Ta=65°C)	
wattage (1400mA)	colour	weight	code	W tot	K olm (1400mA)
1W LED white	graphite	13.30	422212-00	49W	4000K 4000lm - Ra ≥ 80
1W LED white	s. silver	13.30	422213-00	49W	4000K 4000lm - Ra ≥ 80
220-240V 50/60 Hz with built-in ballast.					

1583 Vista - Power LED - COB System - light pollution preventing optical system					
		CLD CTL		LED (Ta=65°C)	
wattage (1400mA)	colour	weight	code	W tot	K olm (1400mA)
1W LED white	graphite	12.50	422212-0016	49W	4000K 4000lm - Ra ≥ 80
1W LED white	s. silver	12.50	422213-0016	49W	4000K 4000lm - Ra ≥ 80
220-240V 50/60 Hz with built-in ballast.					

